

> MATERIAL:
Brass

> SPECIFICATION:
Δ Pinions are suitable for use with speed reducers.

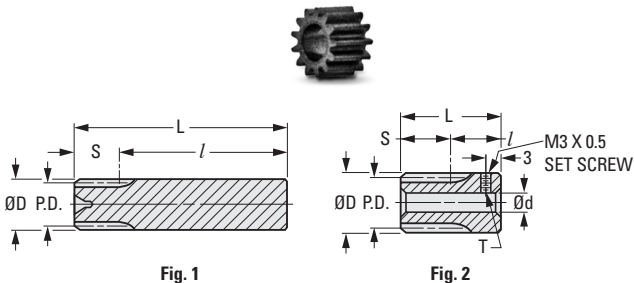


Fig. 1

Fig. 2

Fig. 3

METRIC COMPONENT

Catalog Number	Mod.	Fig. No.	No. of Teeth	P.D.	D Dia.	d Bore	d Tolerance	S Face Width	L	l
Δ A 1B 8MYSH1012	0.15	3	12	1.905	2.205	1	+0.012/+0.004	2.5	—	—
Δ A 1B 8MYSH1013	0.15	3	13	2.055	2.355	1	+0.012/+0.004	2.5	—	—
Δ A 1B 8MYS01515	0.15	3	15	2.295	2.595	1.5	-0.01/-0.03	1.7	—	—
Δ A 1B 8MYSH1015	0.15	3	15	2.31	2.61	1.5	+0.012/+0.004	3.2	—	—
Δ A 1B 8MYS02010	0.2	3	10	2.24	2.64	1.2	-0.02/-0.04	2	—	—
Δ A 1B 8MYS01512	0.2	3	12	2.452	2.852	1.5	-0.01/-0.0	1.7	—	—
Δ A 1B 8MYS02014	0.2	3	14	2.9	3.3	2	-0.01/-0.03	2.8	—	—
Δ A 1B 8MYS02020	0.2	3	20	4.1	4.5	2	-0.01/-0.03	2.8	—	—
Δ A 1B 8MYSH2015	0.25	3	15	3.75	4.25	2	-0.01/-0.03	2.8	—	—
Δ A 1B 8MYS03010	0.3	3	10	3.15	3.75	2	-0.02/-0.04	2	—	—
Δ A 1B 8MYS04014A	0.4	3	14	5.84	6.64	3	-0.014/-0.03	4.5	—	—
Δ A 1B 8MYS04014B	0.4	3	14	5.84	6.64	4	-0.014/-0.03	4.5	—	—
Δ A 1B 8MYK05010	0.5	1	10	5	6	—	—	10	55	45
Δ A 1B 8MYS05010	0.5	3	10	5.24	6.24	2	-0.02/-0.04	4	—	—
Δ A 1B 8MYS05012	0.5	3	12	6.2	7.2	4	-0.02/-0.04	4	—	—
A 1B 8MYK05012	0.5	1	12	6	7	—	—	10	55	45
A 1B 8MYS05012A	0.5	3	12	6.2	7.2	3	-0.02/-0.04	4	—	—
A 1B 8MYK05015	0.5	2	15	7.5	8.5*	3	+0.014/0	8	18	10
A 1B 8MYK05016	0.5	2	16	8	9	3	+0.014/0	8	18	10
A 1B 8MYK05018	0.5	2	18	9	10	3	+0.014/0	8	18	10
A 1B 8MYKH7010	0.75	1	10	7.5	9	—	—	8	55	47
A 1B 8MYKH7012	0.75	1	12	9	10.5	—	—	8	55	47
A 1B 8MYKH7015	0.75	2	15	11.25	12.75	5	+0.018/0	8	20	12
A 1B 8MYK08014	0.8	2	14	11.2	12.8	4	+0.018/0	7	20	13
A 1B 8MYK08015	0.8	2	15	12	13.6	4	+0.018/0	7	20	13

* Hub end is 9 mm O.D.

I
R
T
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
A