


ISO CLASS 7  
 3 mm FACE  
 8 mm BORE  
 20° PRESSURE ANGLE




**MATERIAL:**

303 Stainless Steel or  
 2024 Aluminum Anodized-  
 T4 or T351 Aluminum Alloy,  
 anodized before cutting.



Available on special order:  
 Number of teeth not listed, different  
 bore size and /or material, passivation  
 for stainless steel.

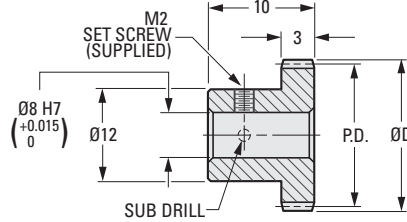

**METRIC COMPONENT**

Catalog Number		No. of Teeth	P.D.	D Dia.
303 Stainless Steel	2024 Aluminum Anodized			
S10T05M024S0308	S10T05M024A0308	24*	12	13
S10T05M025S0308	S10T05M025A0308	25*	12.5	13.5
S10T05M028S0308	S10T05M028A0308	28	14	15
S10T05M030S0308	S10T05M030A0308	30	15	16
S10T05M032S0308	S10T05M032A0308	32	16	17
S10T05M036S0308	S10T05M036A0308	36	18	19
S10T05M040S0308	S10T05M040A0308	40	20	21
S10T05M042S0308	S10T05M042A0308	42	21	22
S10T05M048S0308	S10T05M048A0308	48	24	25
S10T05M050S0308	S10T05M050A0308	50	25	26
S10T05M054S0308	S10T05M054A0308	54	27	28
S10T05M056S0308	S10T05M056A0308	56	28	29
S10T05M060S0308	S10T05M060A0308	60	30	31
S10T05M064S0308	S10T05M064A0308	64	32	33
S10T05M070S0308	S10T05M070A0308	70	35	36
S10T05M072S0308	S10T05M072A0308	72	36	37
S10T05M075S0308	S10T05M075A0308	75	37.5	38.5
S10T05M080S0308	S10T05M080A0308	80	40	41
S10T05M090S0308	S10T05M090A0308	90	45	46
S10T05M096S0308	S10T05M096A0308	96	48	49
S10T05M100S0308	S10T05M100A0308	100	50	51
S10T05M105S0308	S10T05M105A0308	105	52.5	53.5
S10T05M120S0308	S10T05M120A0308	120	60	61
S10T05M132S0308	S10T05M132A0308	132	66	67
S10T05M140S0308	S10T05M140A0308	140	70	71
S10T05M150S0308	S10T05M150A0308	150	75	76
S10T05M160S0308	S10T05M160A0308	160	80	81
S10T05M168S0308	S10T05M168A0308	168	84	85
S10T05M180S0308	S10T05M180A0308	180	90	91
S10T05M192S0308	S10T05M192A0308	192	96	97

\* Hob cuts into hub. Hub diameter never exceeds gear O.D.

- I
- R
- T
- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- A