



ISO CLASS 7  
 5 mm FACE  
 5 mm BORE  
 20° PRESSURE ANGLE


PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM



**> MATERIAL:**

303 Stainless Steel or  
 2024 Aluminum Anodized-  
 T4 or T351 Aluminum Alloy,  
 anodized before cutting.

Available on special order:  
 Number of teeth not listed, different  
 bore size and /or material, passivation  
 for stainless steel.

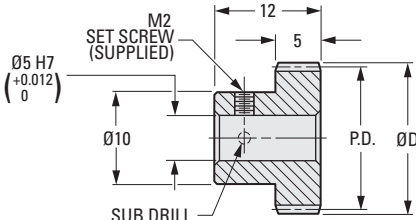

- I
- R
- T
- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- A

**METRIC COMPONENT**

Catalog Number		No. of Teeth	P.D.	D Dia.
303 Stainless Steel	2024 Aluminum Anodized			
S10T05M020S0505	S10T05M020A0505	20*	10	11
S10T05M021S0505	S10T05M021A0505	21	10.5	11.5
S10T05M022S0505	S10T05M022A0505	22	11	12
S10T05M024S0505	S10T05M024A0505	24	12	13
S10T05M025S0505	S10T05M025A0505	25	12.5	13.5
S10T05M026S0505	S10T05M026A0505	26	13	14
S10T05M028S0505	S10T05M028A0505	28	14	15
S10T05M030S0505	S10T05M030A0505	30	15	16
S10T05M032S0505	S10T05M032A0505	32	16	17
S10T05M036S0505	S10T05M036A0505	36	18	19
S10T05M040S0505	S10T05M040A0505	40	20	21
S10T05M044S0505	S10T05M044A0505	44	22	23
S10T05M048S0505	S10T05M048A0505	48	24	25
S10T05M050S0505	S10T05M050A0505	50	25	26
S10T05M055S0505	S10T05M055A0505	55	27.5	28.5
S10T05M060S0505	S10T05M060A0505	60	30	31
S10T05M064S0505	S10T05M064A0505	64	32	33
S10T05M065S0505	S10T05M065A0505	65	32.5	33.5
S10T05M072S0505	S10T05M072A0505	72	36	37
S10T05M084S0505	S10T05M084A0505	84	42	43
S10T05M085S0505	S10T05M085A0505	85	42.5	43.5
S10T05M090S0505	S10T05M090A0505	90	45	46
S10T05M096S0505	S10T05M096A0505	96	48	49
S10T05M100S0505	S10T05M100A0505	100	50	51
S10T05M108S0505	S10T05M108A0505	108	54	55
S10T05M120S0505	S10T05M120A0505	120	60	61
S10T05M144S0505	S10T05M144A0505	144	72	73
S10T05M156S0505	S10T05M156A0505	156	78	79
S10T05M180S0505	S10T05M180A0505	180	90	91
S10T05M192S0505	S10T05M192A0505	192	96	97

\*Hob cuts into hub. Hub diameter never exceeds gear O.D.