

SPECIAL SIZES
METRIC - 3 & 6 mm

PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM

➤ MATERIAL:

Body - Polyurethane
Cords - Kevlar or Fiberglass

➤ OPERATING TEMPERATURE:

-30°C to +85°C (-22°F to +185°F)

➤ SPECIFICATIONS:

Breaking Strength (Double Span)


Kevlar: 300 N per 1 mm (214 lbf per 1/8 in.)

Fiberglass: 165 N per 1 mm (117 lbf per 1/8 in.)

Not representative of the load carrying capacity of the belt; see the technical section.

➤ MODIFICATIONS:

Special Widths - cut to size from sleeves available from stock.

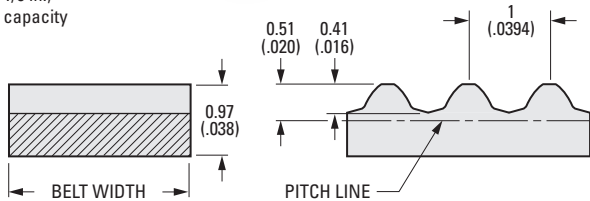

NOTE: Dimensions in () are inch.

➤ Polyurethane Belt with Kevlar Cords:

METRIC COMPONENT CATALOG NUMBER *

A 6 B 1 8 M S

No. of Grooves Code

Belt Width mm	Width Code
3 (.118)	030
6 (.236)	060

Groove Code	Pitch Length	
	mm	Inch
091	91	3.583
105	105	4.134
148	148	5.827
156	156	6.142
165	165	6.496
188	188	7.402
202	202	7.953
205	205	8.071
225	225	8.858

* To be discontinued when present stock is depleted.

➤ Polyurethane Belt with Fiberglass Cords:

METRIC COMPONENT CATALOG NUMBER *

A 6 G 1 8 M S

No. of Grooves Code

Belt Width mm	Width Code
3 (.118)	030
6 (.236)	060

Groove Code	Pitch Length	
	mm	Inch
996	996	39.213

* To be discontinued when present stock is depleted.