


SPUR GEARS • 72 PITCH




AGMA 10
 3/16 FACE
 3/16 BORE
 20° PRESSURE ANGLE


PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM



MATERIAL:
 303 Stainless Steel
 2024 Aluminum, Anodized
 T4 or T351 Aluminum Alloy,
 anodized before cutting



Available on special order:
 14-1/2° P.A., teeth not listed, different
 bore size and/or material, passivation
 for Stainless Steel.

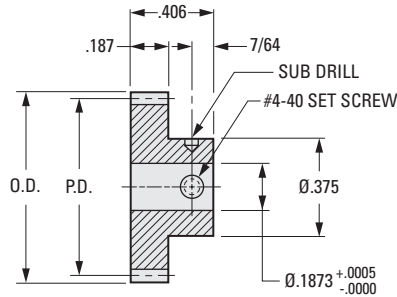

INCH COMPONENT		No. of Teeth	P.D.	O.D.
Catalog Number				
303 Stainless Steel	2024 Aluminum Anodized			
S1084Z-072S024	S1084Z-072A024	24Δ	.3333	.361
S1084Z-072S028	S1084Z-072A028	28Δ	.3889	.417
S1084Z-072S030	S1084Z-072A030	30	.4167	.444
S1084Z-072S032	S1084Z-072A032	32	.4444	.472
S1084Z-072S034	S1084Z-072A034	34	.4722	.500
S1084Z-072S038	S1084Z-072A038	38	.5278	.556
S1084Z-072S040	S1084Z-072A040	40	.5556	.583
S1084Z-072S044	S1084Z-072A044	44	.6111	.639
S1084Z-072S050	S1084Z-072A050	50	.6944	.722
S1084Z-072S054	S1084Z-072A054	54	.7500	.778
S1084Z-072S056	S1084Z-072A056	56	.7778	.806
S1084Z-072S060	S1084Z-072A060	60	.8333	.861
S1084Z-072S064	S1084Z-072A064	64	.8889	.917
S1084Z-072S072	S1084Z-072A072	72	1.0000	1.028
S1084Z-072S080	S1084Z-072A080	80	1.1111	1.139
S1084Z-072S090	S1084Z-072A090	90	1.2500	1.278
S1084Z-072S096	S1084Z-072A096	96	1.3333	1.361
S1084Z-072S100	S1084Z-072A100	100	1.3889	1.417
S1084Z-072S105	S1084Z-072A105	105	1.4583	1.486
S1084Z-072S108	S1084Z-072A108	108	1.5000	1.528
S1084Z-072S110	S1084Z-072A110	110	1.5278	1.556
S1084Z-072S120	S1084Z-072A120	120	1.6667	1.694
S1084Z-072S140	S1084Z-072A140	140	1.9444	1.972
S1084Z-072S144	S1084Z-072A144	144	2.0000	2.028
S1084Z-072S160	S1084Z-072A160	160	2.2222	2.250
S1084Z-072S180	S1084Z-072A180	180	2.5000	2.528
S1084Z-072S216	S1084Z-072A216	216	3.0000	3.028
S1084Z-072S234	S1084Z-072A234	234	3.2500	3.278
S1084Z-072S270	S1084Z-072A270	270	3.7500	3.778
S1084Z-072S300	S1084Z-072A300	300	4.1667	4.194

Δ Hob cuts into hub. Hub diameter never exceeds gear O.D.