



# HUBLESS SPUR GEARS • 72 PITCH



AGMA 10  
1/8 FACE  
3/8 BORE  
20° PRESSURE ANGLE


PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM



**MATERIAL:**  
303 Stainless Steel  
2024 Aluminum, Anodized  
T4 or T351 Aluminum Alloy,  
anodized before cutting

Available on special order:  
14-1/2° P.A., teeth not listed, different  
bore size and/or material, passivation  
for Stainless Steel.

All gears over 2-1/8 Dia. supplied with lightening holes.  
See Index for hubs.  
Assembled upon request at nominal charge.  
Hubs are available in Pin, Clamp, or Fairloc® type.

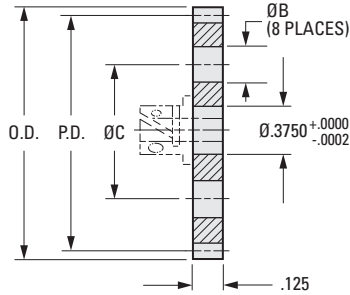

## INCH COMPONENT

Catalog Number		No. of Teeth	P.D.	O.D.	B Dia.	C Dia.
303 Stainless Steel	2024 Aluminum Anodized					
S1268Z-072S043	S1268Z-072A043	43	.5972	.625	—	—
S1268Z-072S048	S1268Z-072A048	48	.6667	.694	—	—
S1268Z-072S054	S1268Z-072A054	54	.7500	.778	—	—
S1268Z-072S060	S1268Z-072A060	60	.8333	.861	—	—
S1268Z-072S064	S1268Z-072A064	64	.8889	.917	—	—
S1268Z-072S072	S1268Z-072A072	72	1.0000	1.028	—	—
S1268Z-072S080	S1268Z-072A080	80	1.1111	1.139	—	—
S1268Z-072S084	S1268Z-072A084	84	1.1667	1.194	—	—
S1268Z-072S090	S1268Z-072A090	90	1.2500	1.278	—	—
S1268Z-072S096	S1268Z-072A096	96	1.3333	1.361	—	—
S1268Z-072S100	S1268Z-072A100	100	1.3889	1.417	—	—
S1268Z-072S105	S1268Z-072A105	105	1.4583	1.486	—	—
S1268Z-072S108	S1268Z-072A108	108	1.5000	1.528	—	—
S1268Z-072S110	S1268Z-072A110	110	1.5278	1.556	—	—
S1268Z-072S120	S1268Z-072A120	120	1.6667	1.694	—	—
S1268Z-072S130	S1268Z-072A130	130	1.8056	1.833	—	—
S1268Z-072S140	S1268Z-072A140	140	1.9444	1.972	—	—
S1268Z-072S144	S1268Z-072A144	144	2.0000	2.028	—	—
S1268Z-072S150	S1268Z-072A150	150	2.0833	2.111	—	—
S1268Z-072S160	S1268Z-072A160	160	2.2222	2.250	3/8	1-3/8
S1268Z-072S170	S1268Z-072A170	170	2.3611	2.389	3/8	1-3/8
S1268Z-072S180	S1268Z-072A180	180	2.5000	2.528	3/8	1-3/8
S1268Z-072S192	S1268Z-072A192	192	2.6667	2.694	3/8	1-3/4
S1268Z-072S200	S1268Z-072A200	200	2.7778	2.806	3/8	1-3/4
S1268Z-072S210	S1268Z-072A210	210	2.9167	2.944	3/8	1-3/4
S1268Z-072S216	S1268Z-072A216	216	3.0000	3.028	3/8	1-3/4
S1268Z-072S288	S1268Z-072A288	288	4.0000	4.028	1/2	2-1/4
S1268Z-072S297	S1268Z-072A297	297	4.1250	4.153	1/2	2-1/2