

> MATERIAL:

- Carbon Steel
- 303 Stainless Steel
- 416 Stainless Steel (Rc 38-45)
- 416 Stainless Steel (Rc 38-45) Black Oxide


PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM



> SPECIFICATIONS:

Tolerances	
Decimals	± .01
Fractions	± 1/32

Stainless Steel Socket Head
Cap Screw Supplied

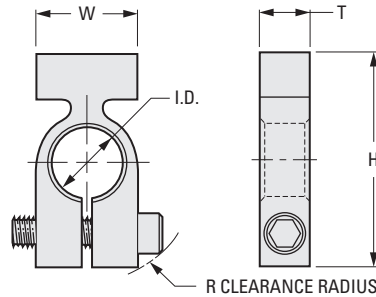

INCH COMPONENT

Catalog Number	Shaft Size	I.D. +.002 -.000	H	T	W	Screw Size	R
Carbon Steel							
S3300Y-J098	1/8	.188	11/16	.140	.312	#2-56	27/64
S3300Y-J099	3/16	.251	51/64	.140	.375	#2-56	1/2
S3300Y-J100	1/4	.313	13/16	.140	.437	#2-56	33/64
S3300Y-J101	5/16	.376	7/8	.140	.500	#2-56	9/16
S3300Y-J102	3/8	.438	1-1/32	.140	.625	#2-56	41/64
S3300Y-J083	1/8	.188	11/16	.250	.312	#6-32	27/64
S3300Y-J084	3/16	.251	51/64	.250	.375	#6-32	1/2
S3300Y-J085	1/4	.313	13/16	.250	.437	#6-32	33/64
S3300Y-J086	5/16	.376	7/8	.250	.500	#6-32	9/16
S3300Y-J087	3/8	.438	1-1/32	.250	.625	#6-32	41/64
303 Stainless Steel							
S3300Y-J088	1/8	.188	11/16	.250	.312	#6-32	27/64
S3300Y-J089	3/16	.251	51/64	.250	.375	#6-32	1/2
S3300Y-J090	1/4	.313	13/16	.250	.437	#6-32	33/64
S3300Y-J091	5/16	.376	7/8	.250	.500	#6-32	9/16
S3300Y-J092	3/8	.438	1-1/32	.250	.625	#6-32	41/64
416 Stainless Steel (Rc 38-45)							
S3300Y-J160	1/8	.188	11/16	.240	.312	#6-32	27/64
S3300Y-J161	3/16	.250	13/16	.240	.375	#6-32	1/2
S3300Y-J162	1/4	.312	13/16	.240	.437	#6-32	33/64
416 Stainless Steel (Rc 38-45), Black Oxide							
S3300Y-J163	1/8	.188	11/16	.240	.312	#6-32	27/64
S3300Y-J164	3/16	.250	13/16	.240	.375	#6-32	1/2
S3300Y-J165	1/4	.312	13/16	.240	.437	#6-32	33/64