

REDUCED CLEARANCE RADIUS


PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM

► **MATERIAL:**


Carbon Steel, Zinc Plated  
303 Stainless Steel

► **SPECIFICATIONS:**

Tolerances	
Decimals	± .005
Fractions	± 1/64



Stainless Steel Socket Head  
Cap Screw Supplied

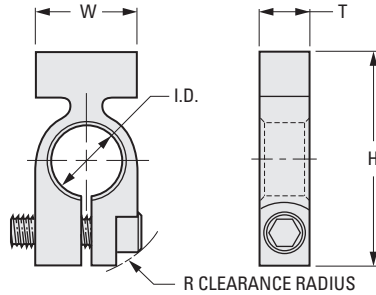

**INCH COMPONENT**

Catalog Number	Shaft Size	I.D. +.001 -.000	H	T	W	Screw Size	R
<b>Carbon Steel, Zinc Plated</b>							
S3301Y-C103	1/8	.188	11/16	.140	.312	#2-56	25/64
S3301Y-C104	3/16	.251	51/64	.140	.375	#2-56	15/32
S3301Y-C105	1/4	.313	13/16	.140	.437	#2-56	31/64
S3301Y-C106	5/16	.376	7/8	.140	.500	#2-56	17/32
S3301Y-C107	3/8	.438	1-1/32	.140	.625	#2-56	39/64
S3301Y-C093	1/8	.188	11/16	.250	.312	#6-32	25/64
S3301Y-C094	3/16	.251	51/64	.250	.375	#6-32	15/32
S3301Y-C095	1/4	.313	13/16	.250	.437	#6-32	31/64
S3301Y-C096	5/16	.376	7/8	.250	.500	#6-32	17/32
S3301Y-C097	3/8	.438	1-1/32	.250	.625	#6-32	39/64
<b>303 Stainless Steel</b>							
S3301Y-C093S	1/8	.188	11/16	.250	.312	#6-32	25/64
S3301Y-C094S	3/16	.251	51/64	.250	.375	#6-32	15/32
S3301Y-C095S	1/4	.313	13/16	.250	.437	#6-32	31/64
S3301Y-C096S	5/16	.376	7/8	.250	.500	#6-32	17/32
S3301Y-C097S	3/8	.438	1-1/32	.250	.625	#6-32	39/64