


E40**e-cad**
Drawings
Available

GEARBOXES

Right Angle Helical Reducers

Heavy Duty 15mm Bores 2.3 – 20 Nm **1:1 - 40:1**

1/8" BSP Pressure Plug fitted one face only.
Will protrude Ø10 x 5 high approx.
Actual height will vary

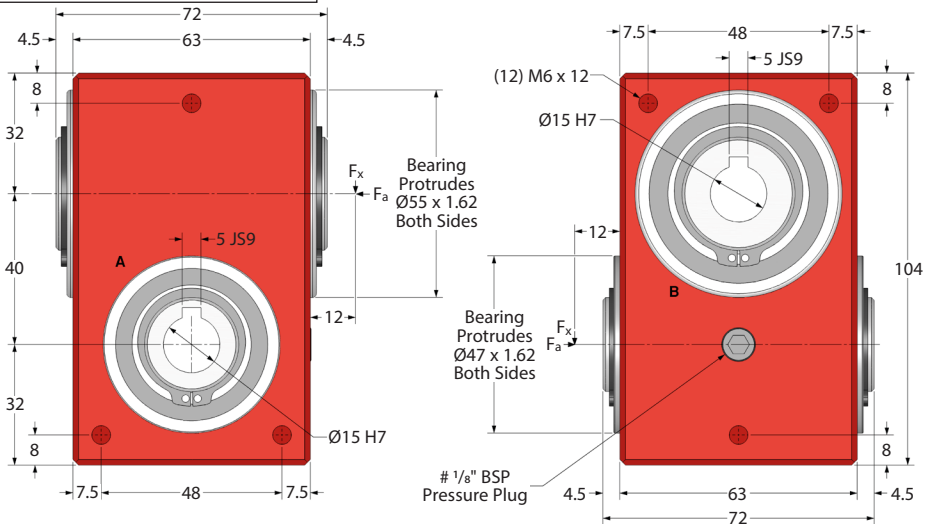

Part Number	Ratio	Type	Input Face	Efficiency at 1000 Rpm	Max Input Speed	Reflected Inertia at Input (kg.m ²) Self	Locking Output
E40-1	1:1	Helical	B	92%	4,000	1.471 x 10 ⁻⁴	✗
E40-2	2:1	Helical	A	90%	4,000	6.738 x 10 ⁻⁵	✗
E40-3	3:1	Helical	A	89%	4,000	5.193 x 10 ⁻⁵	✗
E40-4	4:1	Helical	A	88%	4,000	5.038 x 10 ⁻⁵	✗
E40-5	5:1	Helical	A	80%	4,000	5.095 x 10 ⁻⁵	✗
E40-8	8:1	Wormwheel	A	80%	1,500	5.213 x 10 ⁻⁵	✗
E40-10	10:1	Wormwheel	A	73%	1,500	5.198 x 10 ⁻⁵	✗
E40-20	20:1	Wormwheel	A	67%	1,500	5.110 x 10 ⁻⁵	✓
E40-40	40:1	Wormwheel	A	60%	1,500	5.090 x 10 ⁻⁵	✓
E40-SP	1:1 - 40:1	Special Ratios: Replace SP with required ratio					
E40-SPA	1:1 - 40:1	Low Backlash ≤30': Replace SP with required ratio					
E40-SPLH	1:1 - 40:1	Left Hand Helicals: Replace SP with required ratio					

Output Torque Nm

Rpm Input	Reduction Ratio									
	1:1	2:1	3:1	4:1	5:1	8:1	10:1	20:1	40:1	
3000	2.3	2.3	2.3	2.3	2.3	-	-	-	-	
2000	2.8	2.8	2.8	2.8	2.8	-	-	-	-	
1000	3.8	3.8	3.8	3.8	3.8	7.3	8.0	8.8	9.7	
500	5.0	5.0	5.0	5.0	5.0	10.7	11.3	12.2	13.1	
100	8.0	8.0	8.0	8.0	8.0	14.2	15.0	15.8	16.7	
50	9.0	9.0	9.0	9.0	9.0	17.1	17.7	17.7	18.2	
10	10.0	10.0	10.0	10.0	10.0	19.5	19.6	19.8	20.0	

Testing in your application is necessary.
You will need to assess duty cycles and
confirm suitability with your own calculations.
Figures listed are for guidance only.


GEARBOXES

Right Angle Helical Reducers

Heavy Duty 12 & 14mm Bores 2.3 – 20 Nm **1:1 - 40:1**

e-cad
Drawings
Available

E40

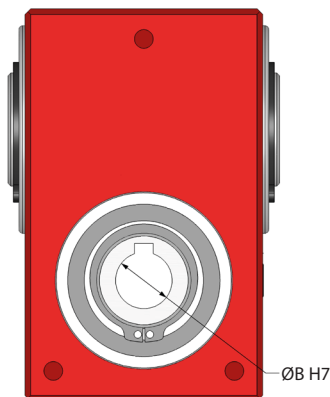

Part Number		Ratio	Type	Input Face	Efficiency at 1000 Rpm	Max Input Speed	Self Locking Output
ØB = 12mm	ØB = 14mm						
E40-1-12	E40-1-14	1:1	Helical	B	92%	4,000	✗
E40-2-12	E40-2-14	2:1	Helical	A	90%	4,000	✗
E40-3-12	E40-3-14	3:1	Helical	A	89%	4,000	✗
E40-4-12	E40-4-14	4:1	Helical	A	88%	4,000	✗
E40-5-12	E40-5-14	5:1	Helical	A	80%	4,000	✗
E40-8-12	E40-8-14	8:1	Wormwheel	A	80%	1,500	✗
E40-10-12	E40-10-14	10:1	Wormwheel	A	73%	1,500	✗
E40-20-12	E40-20-14	20:1	Wormwheel	A	67%	1,500	✓
E40-40-12	E40-40-14	40:1	Wormwheel	A	60%	1,500	✓
E40-SP-12	E40-SP-14	1:1 - 40:1	Special Ratios: Replace SP with required ratio				
E40-SPA-12	E40-SPA-14	1:1 - 40:1	Low Backlash ≤30': Replace SP with required ratio				
E40-SPLH-12	E40-SPLH-14	1:1 - 40:1	Lefthand Helicals: Replace SP with required ratio				

Performance

Weight: 1.67 kg (Approx.)

Standard Backlash: ≈1°. **Low Backlash:** ≤30'.

Greased for Life: Shell Gadus S2 V220AD 2.

LH – Left hand helix reverses output rotation.

Max. Overhung Loads at 1000 Rpm: Overhung Load (F_o) = 40 kg.

Max. Thrust Loads at 1000 Rpm: Thrust Load (F_t) = 30 kg.

Self Locking Output: Subject to ratio and only applies in static condition.

Amount of locking effect may vary due to manufacturing processes.

Modifications and specials are available. Please contact Technical Sales department.

ØB Bore Sizes

Standard part 15 mm H7 with 5 mm keyway

14 mm H7 with 5 mm keyway

12 mm H7 with 4 mm keyway

All bores supplied with keyway to DIN 6885 - Js9 tolerance.

Output Shafts (To Suit 15mm Bore)

E40-X (Single), E40-DX (Double).

Input/Output Key: RKS-30.