

ZT 432 Series - ANSI

One Piece Flanged Body Design

Material:	PPH, PPG, Kynar® PVDF
Size:	1/2" - 4"
Pressure Rating:	232psi (PPH, PPG, Kynar® PVDF)
Seats:	PTFE
Seals:	PTFE, EPDM, FEP, FKM
Connections:	Flanged - ANSI





ISO 9002 CERTIFIED

Special Features


- Uni-body design eliminates fugitive emissions
- Ideal for highly corrosive fluids
- Light weight design
- PTFE chevron packing
- Full port design
- Available with out internal elastomers
- Low maintenance and extended operational life
- Rugged industrial design
- Cost effective alternative to stainless steel, exotic alloy or PTFE lined valves

Pressure/Temperature Graph: Working PSI/Fahrenheit

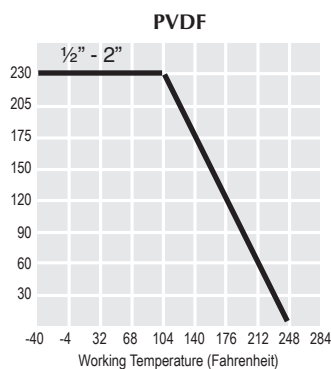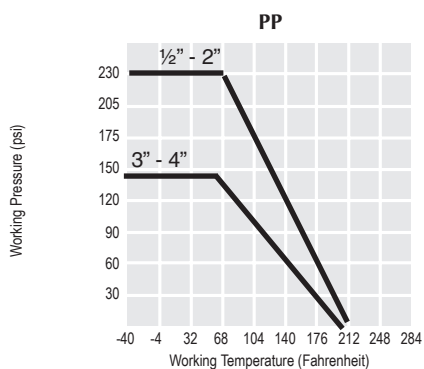

ZT 432 Series - ANSI

Dimensional Data

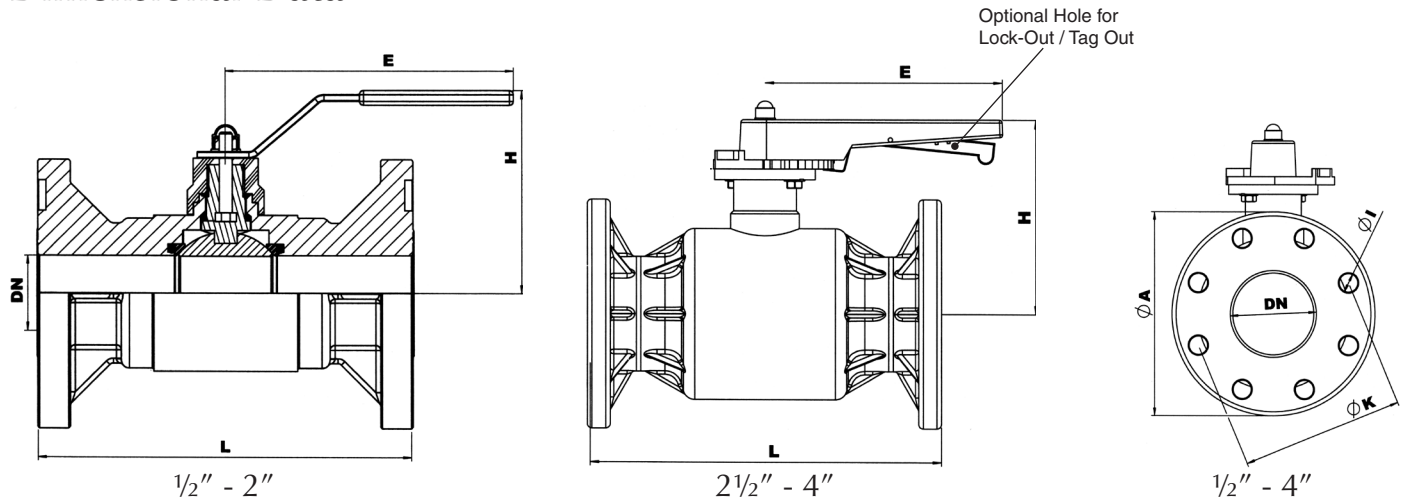


Nom. Size	A	E	H	I	K	L	Bolt Holes
1/2"	3.74	2.87	1.99	0.63	2.36	4.25	4
3/4"	4.13	6.06	3.94	0.63	2.76	4.65	4
1"	4.61	6.06	3.94	0.63	3.13	5.00	4
1 1/2"	5.91	7.17	4.84	0.63	3.88	6.50	4
2"	6.50	7.17	5.24	0.75	4.75	7.00	4
3"	7.87	8.46	7.99	0.75	6.00	8.00	4
4"*	8.86	8.46	7.99	0.75	7.48	9.00	8

* Reduced Port

Parts Listing

- A. Body
- B. Flat Stem Seat
- C. Conical Stem Seat
- D. Drive Socket
- E. Handle
- F. Washer
- G. Nut
- H. Cap

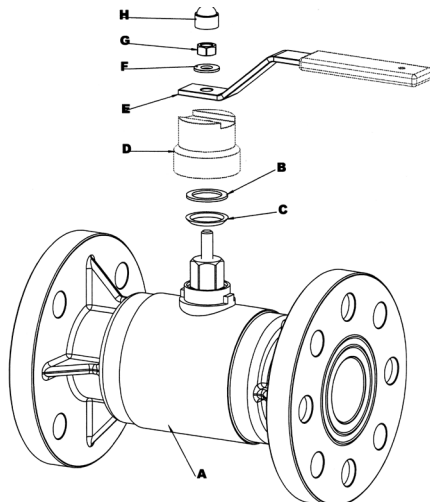

- 1. Body
- 2. Drive Socket
- 3. Plate
- 4. Handle
- 5. Trigger
- 6. Spring
- 7. Screw & Bolts
- 8. Cap

