

2NO+2NC CONTACTOR, AC3: 7.5KW AC 110V 50HZ 4-POLE,  
2NO+2NC, SZ: S00, SCREW TERMINAL



|   |           |
|---|-----------|
| product brandname                                   | SIRIUS    |
| Product designation                                 | contactor |
| Product type designation                            | 3RT25     |
| General technical data                              |           |
| Size of contactor                                   | S00       |
| Product extension                                   |           |
| • function module for communication                 | No        |
| • Auxiliary switch                                  | Yes       |
| Insulation voltage                                  |           |
| • rated value                                       | 690 V     |
| Degree of pollution                                 | 3         |
| Surge voltage resistance rated value                | 6 kV      |
| maximum permissible voltage for safe isolation      |           |
| • between coil and main contacts acc. to EN 60947-1 | 400 V     |
| Protection class IP                                 |           |
| • on the front                                      | IP20      |
| Shock resistance                                    |           |
| • at rectangular impulse                            |           |

|   |                            |
|---|----------------------------|
| — at AC   | 7,3g / 5 ms, 4,7g / 10 ms  |
| • with sine pulse   |                            |
| — at AC   | 11,4g / 5 ms, 7,3g / 10 ms |
| <b>Mechanical service life (switching cycles)</b>                                   |                            |
| • of contactor typical  | 30 000 000                 |
| • of the contactor with added electronics-compatible auxiliary switch block typical | 5 000 000                  |
| • of the contactor with added auxiliary switch block typical                        | 10 000 000                 |

|  |                |
|--|----------------|
| <b>Ambient conditions</b>                                      |                |
| <b>Installation altitude at height above sea level maximum</b> | 2 000 m        |
| <b>Ambient temperature</b>                                     |                |
| • during operation   | -25 ... +60 °C |
| • during storage   | -55 ... +80 °C |

|  |                     |
|--|---------------------|
| <b>Main circuit</b>  |                     |
| <b>Number of poles for main current circuit</b>                    | 4                   |
| <b>Number of NO contacts for main contacts</b>                     | 2                   |
| <b>Number of NC contacts for main contacts</b>                     | 2                   |
| <b>Operating current</b>   |                     |
| • at AC-1  |                     |
| — up to 690 V at ambient temperature 40 °C rated value             | 22 A                |
| — up to 690 V at ambient temperature 60 °C rated value             | 20 A                |
| • at AC-2 at AC-3 at 400 V   |                     |
| — per NO contact rated value                                       | 16 A                |
| — per NC contact rated value                                       | 9 A                 |
| <b>Connectable conductor cross-section in main circuit at AC-1</b> |                     |
| • at 60 °C minimum permissible                                     | 2.5 mm <sup>2</sup> |
| • at 40 °C minimum permissible                                     | 4 mm <sup>2</sup>   |
| <b>Operating current</b>   |                     |
| • at 1 current path at DC-1  |                     |
| — at 24 V rated value  | 20 A                |
| — at 110 V rated value   | 2.1 A               |
| — at 220 V rated value   | 0.8 A               |
| — at 440 V rated value   | 0.6 A               |
| • with 2 current paths in series at DC-1                           |                     |
| — at 24 V rated value  | 20 A                |
| — at 110 V rated value   | 12 A                |
| — at 220 V rated value   | 1.6 A               |

|   |              |
|---|--------------|
| — at 440 V rated value  | 0.8 A        |
| <b>Operating current</b>  |              |
| • at 1 current path at DC-3 at DC-5   |              |
| — at 24 V per NC contact rated value  | 20 A         |
| — at 24 V per NO contact rated value  | 20 A         |
| — at 110 V per NC contact rated value   | 0.075 A      |
| — at 110 V per NO contact rated value   | 0.15 A       |
| — at 220 V per NC contact rated value   | 0.375 A      |
| — at 220 V per NO contact rated value   | 0.75 A       |
| • with 2 current paths in series at DC-3 at DC-5  |              |
| — at 110 V per NC contact rated value   | 0.175 A      |
| — at 110 V per NO contact rated value   | 0.35 A       |
| — at 24 V per NC contact rated value  | 20 A         |
| — at 24 V per NO contact rated value  | 20 A         |
| <b>Operating power</b>  |              |
| • at AC-1   |              |
| — at 230 V rated value  | 7.5 kW       |
| — at 400 V rated value  | 13 kW        |
| • at AC-2 at AC-3   |              |
| — at 230 V per NC contact rated value   | 2.2 kW       |
| — at 230 V per NO contact rated value   | 4 kW         |
| — at 400 V per NC contact rated value   | 4 kW         |
| — at 400 V per NO contact rated value   | 7.5 kW       |
| <b>Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor</b> | 2.2 W        |
| <b>No-load switching frequency</b>  |              |
| • at AC   | 10 000 1/h   |
| • at DC   | 10 000 1/h   |
| <b>Operating frequency</b>  |              |
| • at AC-1 maximum   | 1 000 1/h    |
| <b>Control circuit/ Control</b>   |              |
| <b>Type of voltage of the control supply voltage</b>  | AC           |
| <b>Control supply voltage at AC</b>   |              |
| • at 50 Hz rated value  | 110 V        |
| • at 60 Hz rated value  | 110 V        |
| <b>Operating range factor control supply voltage rated value of magnet coil at AC</b>         |              |
| • at 50 Hz  | 0.8 ... 1.1  |
| • at 60 Hz  | 0.85 ... 1.1 |
| <b>Apparent pick-up power of magnet coil at AC</b>  | 37 V·A       |
| • at 50 Hz  | 37 V·A       |
| <b>Inductive power factor with closing power of the coil</b>                                  | 0.8          |

|  |              |
|--|--------------|
| • at 50 Hz   | 0.8          |
| <b>Apparent holding power of magnet coil at AC</b>                           | 5.7 V·A      |
| • at 50 Hz   | 5.7 V·A      |
| <b>Inductive power factor with the holding power of the coil</b>             | 0.25         |
| • at 60 Hz   | 0.25         |
| <b>Closing delay</b>   |              |
| • at AC  | 8 ... 33 ms  |
| <b>Opening delay</b>   |              |
| • at AC  | 4 ... 15 ms  |
| <b>Arcing time</b>   | 10 ... 15 ms |
| <b>Residual current of the electronics for control with signal &lt;0&gt;</b> |              |
| • at AC at 230 V maximum permissible   | 0.004 A      |

#### Auxiliary circuit

|  |   |
|--|---|
| <b>Number of NC contacts</b>                     |   |
| • for auxiliary contacts                         |   |
| — instantaneous contact                          | 0   |
| <b>Number of NO contacts</b>                     |   |
| • for auxiliary contacts                         |   |
| — instantaneous contact                          | 0   |
| <b>Operating current at AC-12 maximum</b>        | 10 A  |
| <b>Operating current at AC-15</b>                |   |
| • at 230 V rated value                           | 10 A  |
| • at 400 V rated value                           | 3 A   |
| <b>Operating current at DC-12</b>                |   |
| • at 48 V rated value                            | 6 A   |
| • at 60 V rated value                            | 6 A   |
| • at 110 V rated value                           | 3 A   |
| • at 125 V rated value                           | 2 A   |
| • at 220 V rated value                           | 1 A   |
| • at 600 V rated value                           | 0.15 A  |
| <b>Operating current at DC-13</b>                |   |
| • at 24 V rated value                            | 10 A  |
| • at 48 V rated value                            | 2 A   |
| • at 60 V rated value                            | 2 A   |
| • at 110 V rated value                           | 1 A   |
| • at 220 V rated value                           | 0.3 A   |
| • at 600 V rated value                           | 0.1 A   |
| <b>Contact reliability of auxiliary contacts</b> | 1 faulty switching per 100 million (17 V, 1 mA) |

#### UL/CSA ratings

|  |              |
|--|--------------|
| <b>Yielded mechanical performance [hp]</b> <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> </ul> | 1 hp<br>2 hp |
| <b>Contact rating of auxiliary contacts according to UL</b>  | A600 / Q600  |

### Short-circuit protection

|  |  |
|--|--|
| <b>Design of the fuse link</b> <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of assignment 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul> | gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 35 A<br>gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 20 A<br>fuse gL/gG: 10 A |
|--|--|

### Installation/ mounting/ dimensions

|  |  |
|--|--|
| <b>Mounting position</b>   | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| <b>Mounting type</b> <ul style="list-style-type: none"> <li>• Side-by-side mounting</li> </ul>   | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022<br>Yes  |
| <b>Height</b>  | 57.5 mm  |
| <b>Width</b>   | 45 mm  |
| <b>Depth</b>   | 73 mm  |
| <b>Required spacing</b> <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 0 mm<br>0 mm<br>0 mm<br>0 mm<br>0 mm<br><br>0 mm<br>0 mm<br>0 mm<br>6 mm<br>0 mm<br><br>0 mm<br>0 mm<br>0 mm<br>0 mm<br>6 mm         |

## Connections/Terminals

|   |   |
|---|---|
| <b>Type of electrical connection</b>                |   |
| • for main current circuit                          | screw-type terminals  |
| • for auxiliary and control current circuit         | screw-type terminals  |
| <b>Type of connectable conductor cross-sections</b> |   |
| • for main contacts                                 |   |
| — solid   | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup> |
| — single or multi-stranded                          | 2x (0,5 ... 1,5 mm <sup>2</sup> ), 2x (0,75 ... 2,5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup> |
| — finely stranded with core end processing          | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )                       |
| • at AWG conductors for main contacts               | 2x (20 ... 16), 2x (18 ... 14), 2x 12   |
| <b>Type of connectable conductor cross-sections</b> |   |
| • for auxiliary contacts                            |   |
| — solid   | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup> |
| — single or multi-stranded                          | 2x (0,5 ... 1,5 mm <sup>2</sup> ), 2x (0,75 ... 2,5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup> |
| — finely stranded with core end processing          | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )                       |
| • at AWG conductors for auxiliary contacts          | 2x (20 ... 16), 2x (18 ... 14), 2x 12   |

## Safety related data

|   |                 |
|---|-----------------|
| <b>B10 value</b>  |                 |
| • with high demand rate acc. to SN 31920                                  | 1 000 000       |
| <b>Proportion of dangerous failures</b>                                   |                 |
| • with low demand rate acc. to SN 31920                                   | 40 %            |
| • with high demand rate acc. to SN 31920                                  | 73 %            |
| <b>Failure rate [FIT]</b>   |                 |
| • with low demand rate acc. to SN 31920                                   | 100 FIT         |
| <b>Product function</b>   |                 |
| • Mirror contact acc. to IEC 60947-4-1                                    | Yes; with 3RH29 |
| • positively driven operation acc. to IEC 60947-5-1                       | No              |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b> |                 |
|   | 20 y            |

## Certificates/approvals

| General Product Approval | Functional Safety/Safety of Machinery | Declaration of Conformity |
|--------------------------|---------------------------------------|---------------------------|
|--------------------------|---------------------------------------|---------------------------|



[Baumusterbescheinigung](#)



| Test Certificates | Shipping Approval |
|-------------------|-------------------|
|-------------------|-------------------|

[spezielle Prüfbescheinigung](#)

[Typprüfbescheinigung/Werkszeugnis](#)



| Shipping Approval | other |
|-------------------|-------|
|-------------------|-------|



[Umweltbestätigung](#)

[Bestätigungen](#)



#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2518-1AF00>

**Cax online generator**




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2518-1AF00>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<https://support.industry.siemens.com/cs/ww/en/ps/3RT2518-1AF00>


**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2518-1AF00&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2518-1AF00&lang=en)

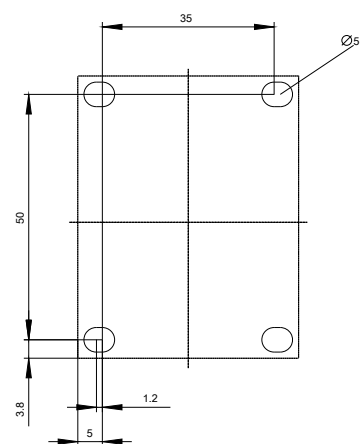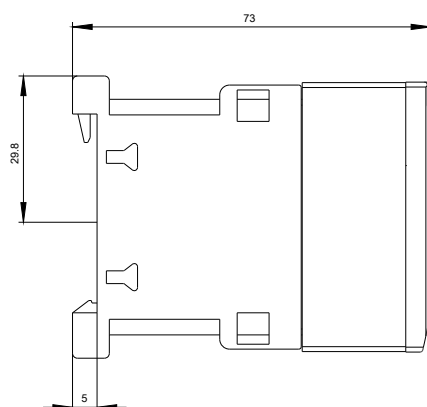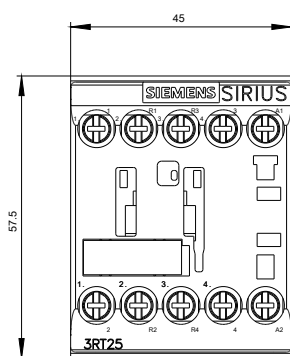



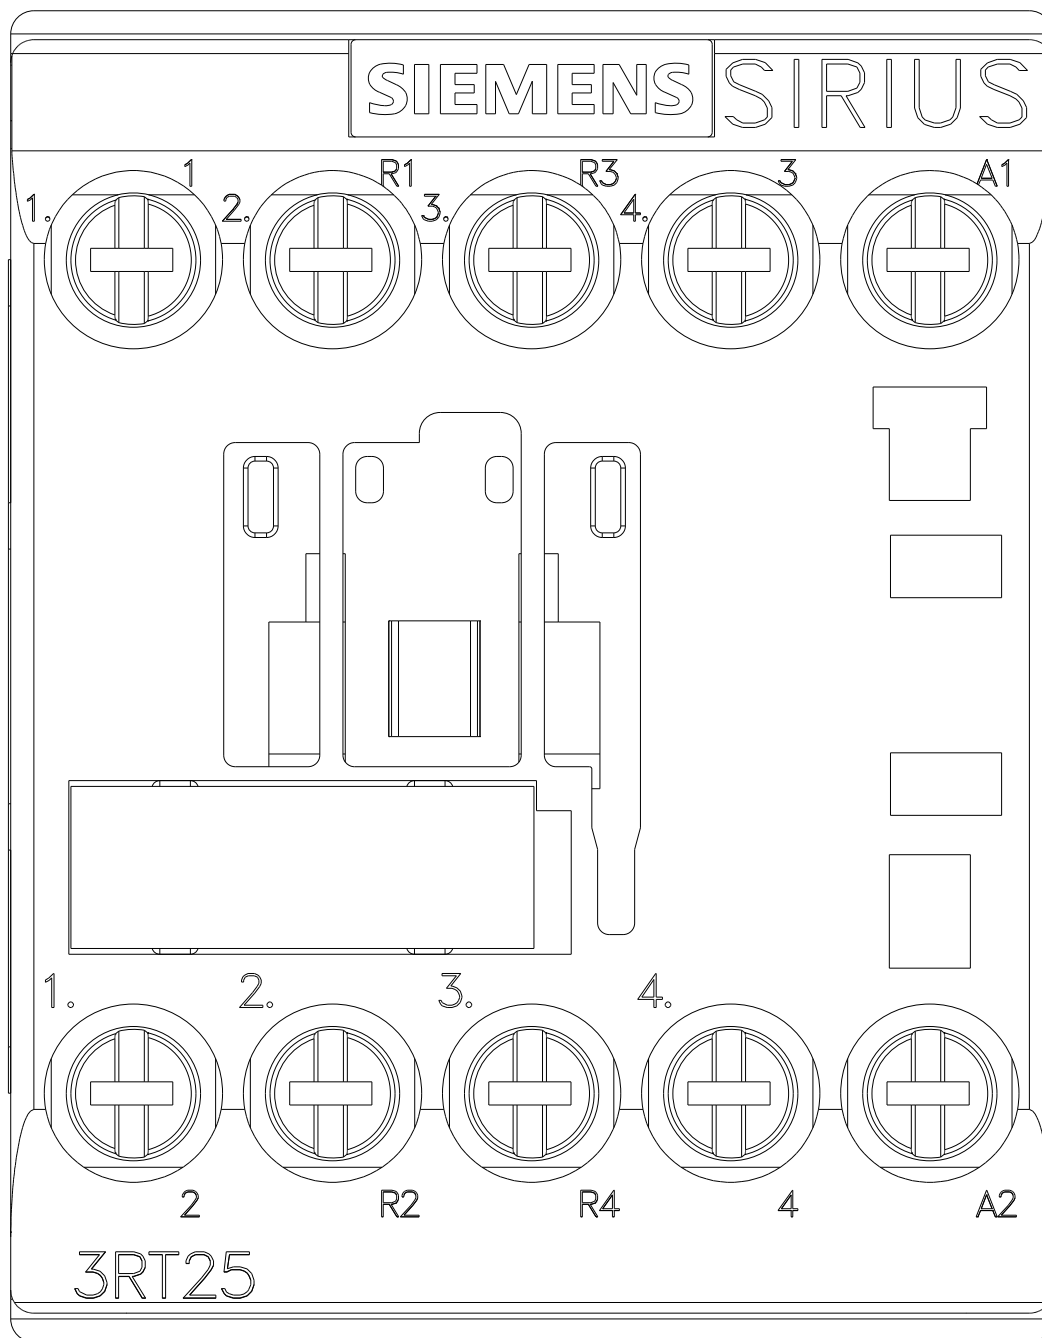

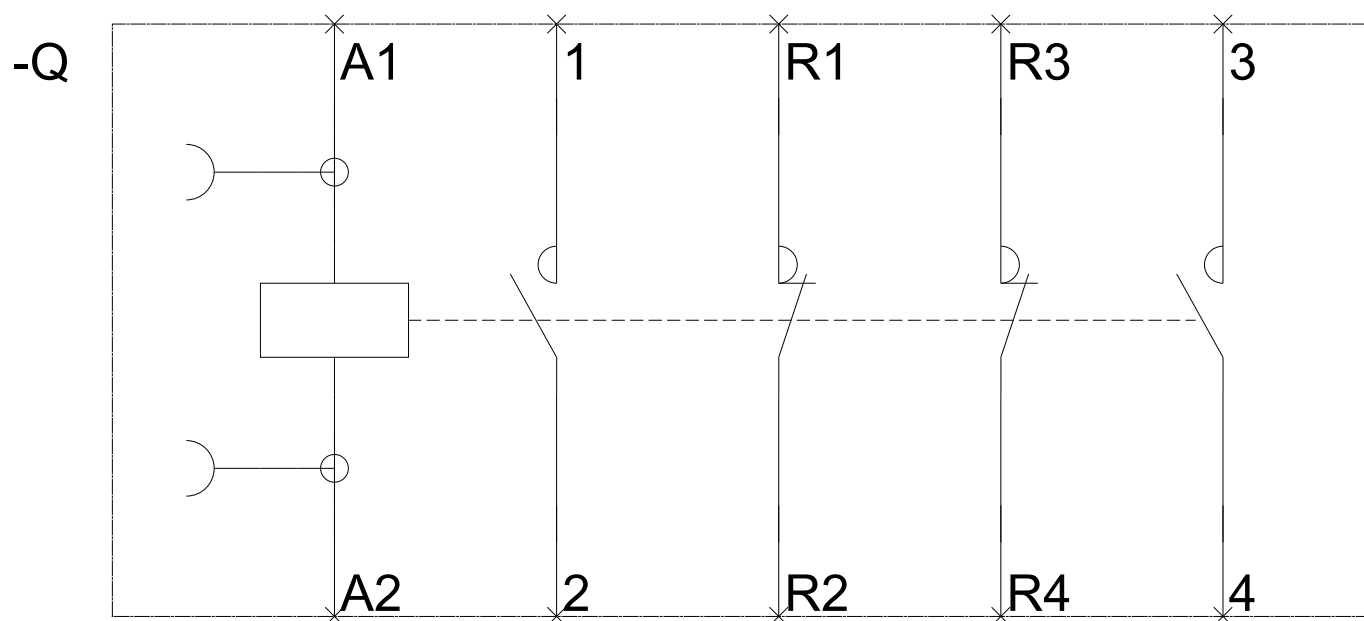

last modified:

02/27/2017