


UNWINDING INFORMATION  
 FEED FROM LEFT TO RIGHT  
 CRIMP IN FRONT & UPRIGHT

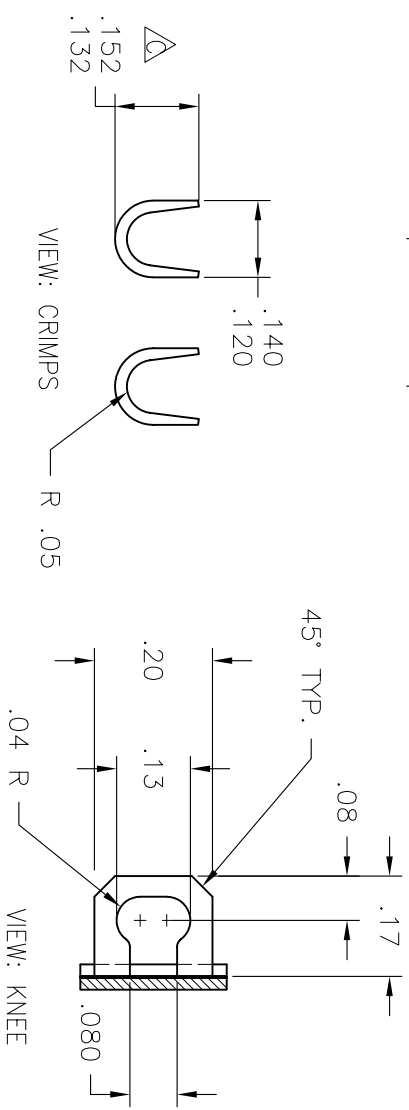

**NOTES:**

- 1.) REFER TO UL1681 PAGE 10, FIG. C1.5, AND CLAUSE 4.12.2 IN CSA C22.2 WHICH REFERENCES NEMA WD-16-1988.
- 2.) CRITICAL DIMENSION TO BE CHECKED AS PART OF THE IN-PROCESS INSPECTION (SPC).

**HEVCO**  
 HEVCO PRODUCTS, INC.  
 TOMS RIVER, NEW JERSEY  
 (732) 286-1800 FAX (732) 244-8843

**PART DRAWING**

TOLERANCES +/-: .XX=.01 .XXX=.005 ANG.=2	MATL.: BRASS	FINISH: TINNED
THICK: .021	WIRE STRIP LENGTH: .21	
WIRE RANGE (AWG): 18-14		
TOOLING: UNV. DIE-A011, PUNCH-C236, ANVL-C254 /DIE BASE-0504, PUNCHES-0C73(18), 0K18(16-14), ANVLS-00A9		
DRAWN: M.S. DATE: 09/26/91	REVISED: MEG DATE: 06/28/01	APPROVED: DATE:
112-8-TIN-L/R		
DESCRIPTION		

5084	5080-011	G
PART NUMBER	CATALOG NUMBER	REVISION

