




NOTES:

- 1.) REFER TO UL1681 PAGE 10, FIG. C1.5, AND CLAUSE 4.12.2 IN CSA C22.2 WHICH REFERENCES NEMA WD-16-1988.
- 2.)  $\Delta$  CRITICAL DIMENSION TO BE CHECKED AS PART OF THE IN-PROCESS INSPECTION (SPC).

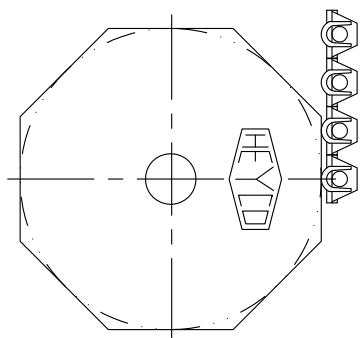

LS-91824



UNWINDING INFORMATION  
 FEED FROM RIGHT TO LEFT  
 CRIMP IN FRONT & UPRIGHT

**HEYCO**  
 HEYCO PRODUCTS, INC.  
 TOMS RIVER, NEW JERSEY  
 (732) 286-4336 FAX (732) 244-8843

PART DRAWING

TOLERANCES +/-: .XX=.01 .XXX=.005 ANG.=2°	FINISH:
MATL.: BRASS	WIRE STRIP LENGTH: .19
THICK: .028	WIRE RANGE (AWG): 18-14
TOOLING: UNIV. DIE-A001, PUNCH-C234, C714, ANVIL-C253, C715 / DIE BASE-0629, PUNCHES-0A66(18-16), 0D59(14), ANVILS-0K85	REVISION: MEG
DRAWN: M.S.	DATE: 06/20/01
DATE: 09/26/91	APPROVED:

110-POL-R/L	
DESCRIPTION	
5424	5400-102
PART NUMBER	CATALOG NUMBER
	REVISION
	G