


VIEW: CRIMPS

VIEW: TABS


TOLERANCE UNLESS OTHERWISE SPECIFIED: .XX ± .010 .XXX ± .005 ANGULAR ± 2°

MATERIAL:	BRASS
FINISH:	THICKNESS: .028



HEYCO PRODUCTS, INC.
TOMS RIVER, NEW JERSEY

HEYCO PRODUCTS, INC. claims proprietary rights to the material disclosed herein, and its HEYCO PRODUCTS, INC. It is issued in confidence for use only as authorized, and may not be reproduced or described or shown to others without written permission from HEYCO PRODUCTS, INC.

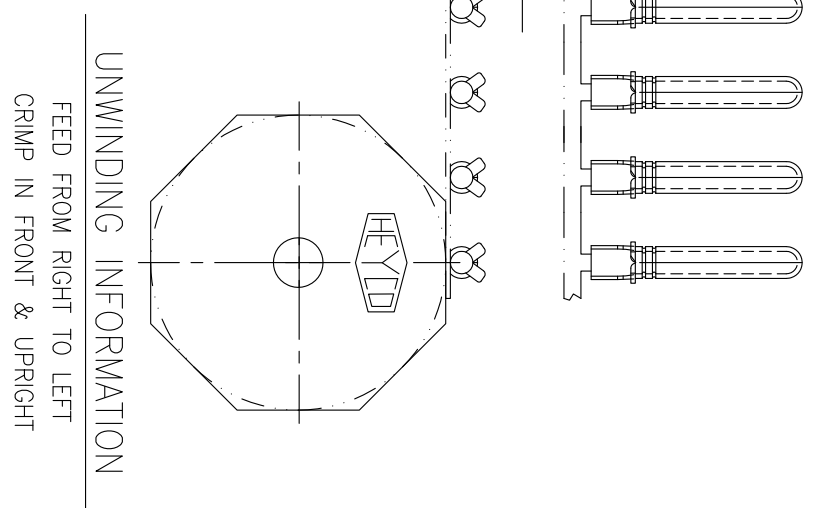

NOTES:

- 1.) REFER TO UL1681 PAGE 10, FIG. C1.5, AND CLAUSE 4.12.2 IN CSA C22.2 WHICH REFERENCES NEMA WD-16-1988.
- 2.) ∇C CRITICAL DIMENSION TO BE CHECKED AS PART OF THE IN-PROCESS INSPECTION (SPC).
- 3.) ∇M MAJOR DIMENSION CRITICAL AT SET-UP

TOOLING: UNW. DIE-A001, PUNCH-C001, ANWIL-C009 DIE BASE- 0626, PUNCHES- 0K55, ANWILS- 0K53 CUSTOM- , PUNCH- , ANWIL-	DESCRIPTION: CATALOG DRAWING	5881-002	5881
WIRE RANGE: 14-10	WIRE STRIP LENGTH: .19	186-R/L	PART No.
			REV.: G