
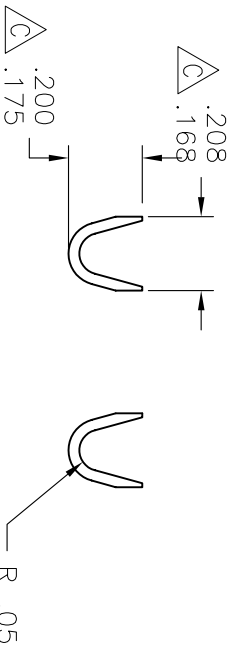


UNWINDING INFORMATION
 FEED FROM RIGHT TO LEFT
 CRIMP IN FRONT & UPRIGHT

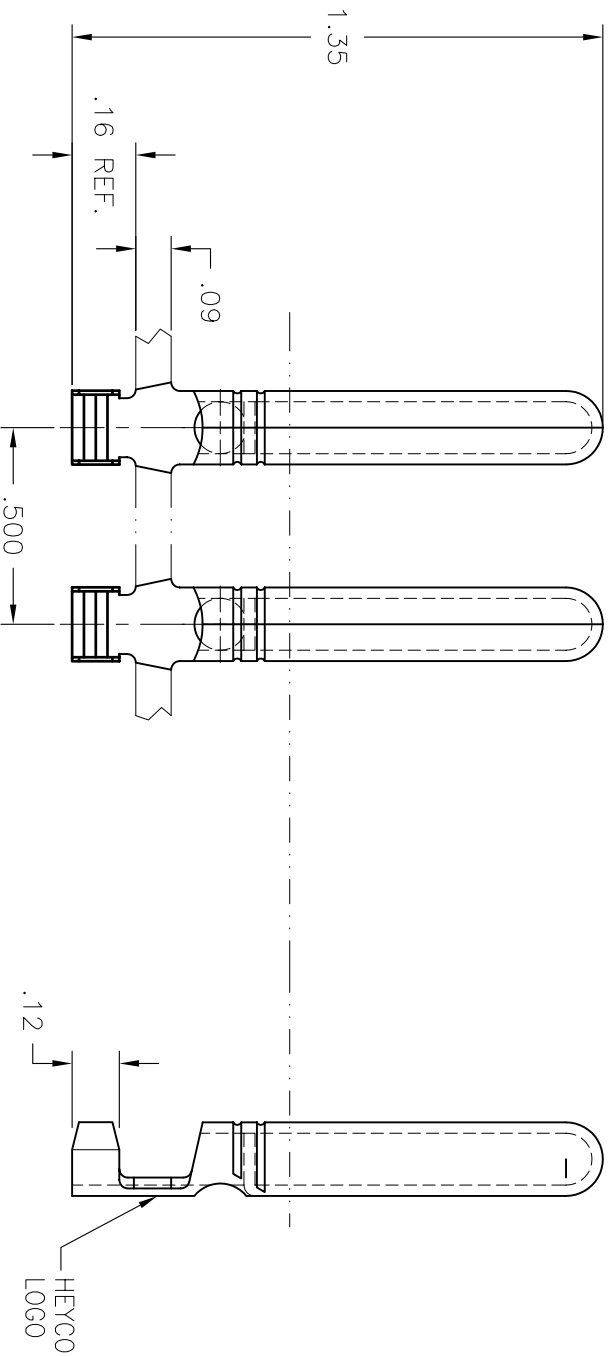

VIEW: CRIMPS

NOTES:

- 1.) REFER TO UL1681 PAGE 10, FIG. C1.5, AND CLAUSE 4.12.2 IN CSA C22.2 WHICH REFERENCES NEMA WD-16-1988.
- 2.) CRITICAL DIMENSION TO BE CHECKED AS PART OF THE IN-PROCESS INSPECTION (SPC).

(732) 286-4336

HEYCO PRODUCTS, INC.
 TOMS RIVER, NEW JERSEY
 FAX (732) 244-8843

PART DRAWING

TOLERANCES +/-: .XX=.01 .XXX=.005 ANG.=2°	
MATL: BRASS	FINISH:
THICK: .028	WIRE STRIP LENGTH: .19
WIRE RANGE (AWG): 18-12	
TOOLING: UNV. DIE-A001, PUNCH-C360, ANVL-C365 /DIE BASE-0517, PUNCHES-0B18(16-18), 0K14(12-14), ANVLS-0B16(12-18)	
DRAWN: PJH DATE: 2-13-92	REVISED: MEG DATE: 06/29/01
APPROVED: _____ DATE: _____	

188-0-R/L

5923	5923-002	E
PART NUMBER	CATALOG NUMBER	REVISION