

ProControl™

MODEL: PV10P12080A0

TYPICAL PERFORMANCE

Humphrey®


CONNECTIONS

Pneumatic	10-32 UNF ports
Electrical	18" Lead Wires (black)
Mounting	#6-32 x 0.25" Dp (2x)


FEATURES

- Each ProControl™ Valve is tested for unactuated seat leakage not to exceed 2ccm at rated pressure (Port 1 > Port 2).
- Typical hysteresis is 8% or less and measured from ascension and descension of current at a given flow point.
- Control flow with direct current to 400mA or with PWM. For best results, we recommend PWM of 5k Hz or greater.
- When testing and evaluating proportional valves, consider the Humphrey Valve Driver, model PCD. PCD accepts a 4-20mA, 0-5VDC or 0-10VDC signal and drives the proportional valve accordingly.
- PV10P12080A0 may be calibrated to specific customer parameters in some applications. Contact an application specialist for details (below).
- For additional assistance in understanding, selecting and using proportional control valves, contact a Humphrey application specialist at:
1-844-447-9009
procontrolway@humphrey-products.com

Graph depicts typical performance of Humphrey Proportional Valve Model PV10P12080A0 using a stabilized upstream pressure of 100 PSI, filtered air, at Port 1 and amperage of 0-400mA. Performance is repeatable for millions of cycles. If pressure or current exceed maximum recommended values, performance may be compromised.

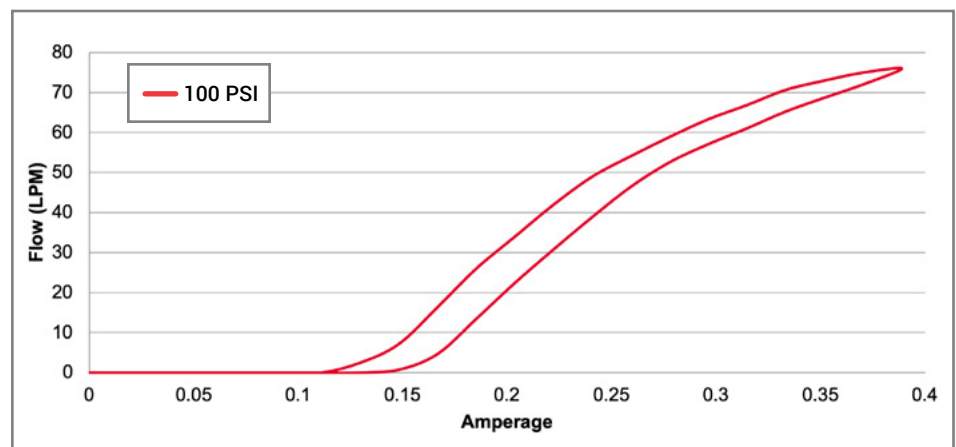

Calibrated with stabilized upstream pressure of 100 PSI to a flow of 75 SLPM @ 400mA.

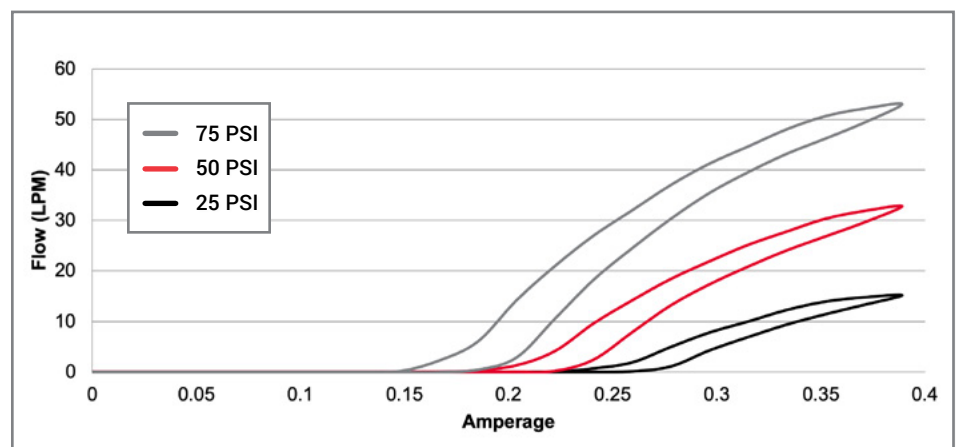

PV10P12080A0 will have precision control but less flow when upstream pressure is lower than 100 PSI. Typical curves with stabilized upstream pressures of 25, 50 and 75 PSI are shown.

HUMPHREY-PRODUCTS.COM

A privately owned US company since 1901.
© 2021 Humphrey Products Company, Inc.
Printed in USA.
PSPCDT2521

Humphrey Products Company
5070 East N Avenue
Kalamazoo, MI 49048 USA
P: 269.381.5500
F: 269.381.4113



ACCESS ONLINE CATALOG

Obtain 3D CAD Download, CAD Viewer,
2D Dimensional Drawings, Product Images,
DataSheet PDFs, Product Accessories

Certified: ISO 9001:2015