
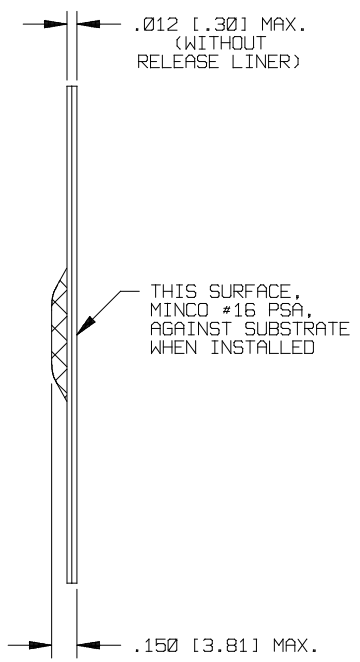


REVISIONS				
REV.	DESCRIPTION	DATE	DRAFTER	ENGINEER
A	UPDATED PER ECO 1577075	05-16-11	LRK	JPN
B	UPDATED PER ECO 3507583	05-28-24	JMD 2576	GDH 103772

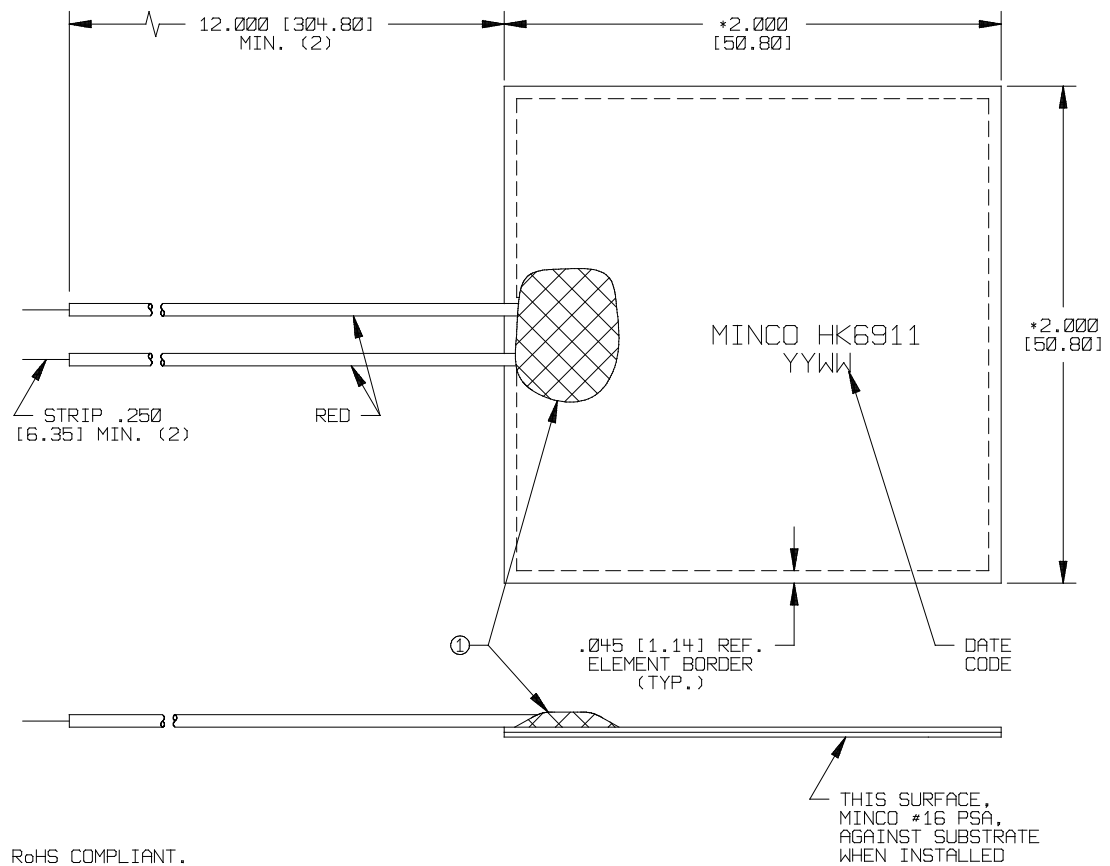

9. PART IS RoHS COMPLIANT.
8. DIMENSIONS PRECEDED BY * ARE CONTROLLED BY ENGINEERING DESIGN AND TOOLING.
7. HEATER IS SUPPLIED WITH MINCO #16 PRESSURE-SENSITIVE ADHESIVE AND RELEASE LINER WHICH COVER THE ENTIRE SUBSTRATE SIDE. INSTALL HEATER PER SPI 00-0603, A COPY OF WHICH IS INCLUDED WITH SHIPMENT.
6. INSULATION: POLYIMIDE.
5. LEADWIRE: AWG #26, STRANDED, TFE INSULATED PER NEMA HP3
4. DIELECTRIC STRENGTH: 500 VOLTS RMS AT 60 Hz FOR 1 MINUTE, ELEMENT TO OUTER SURFACES.
3. TEMPERATURE LIMIT: 100°C MAXIMUM, AT ZERO POWER.
2. RESISTANCE: 22.08 OHMS (24.28/19.87); 35.5 WATTS REF. AT 28 VOLTS.
1. ELEMENT: NON-INDUCTIVE PATTERN.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES DIMENSIONS IN () ARE MILLIMETERS		INITIALS	DATE
ONE PLACE (.0)	} ~.030 [~.76]	DR	BN 1786
TWO PLACE (.00)		CHK	LRK 2368
THREE PLACE (.000)		APP	
MATERIAL		ENGR	JPN 3182
FINISH		QA	
		PRD	
		NEXT ASSY USED	CATEGORY
		ON	INIT. JOB

①	AR	701-9003	URETHANE
ITEM	RECD	PART/STOCK NO	MATERIAL DESCRIPTION
TITLE			<p style="text-align: center;">MINCO</p> <p style="text-align: center;">www.minco.com</p> <p style="text-align: center;">COMPANY CONFIDENTIAL PROPRIETARY INFORMATION OF MINCO PRODUCTS, INC. DO NOT DUPLICATE</p>
THERMOFOIL HEATER MODEL HK6911			
HK6911			REV. B
SCALE	NONE	STOCK NO.	CAGE IDENT 09369
DWG SIZE	B		SHEET 1 OF 1