

Schedule 80 PVC Piping Systems


Flange - Van Stone (S)

3" - 12" Have CPVC Ring

150 psi @ 73°F (10.3 bar @ 22.7°C)

14" & 16" 100 psi @ 73°F (6.9 bar @ 22.7°C)

HC = Honeycomb (Front)

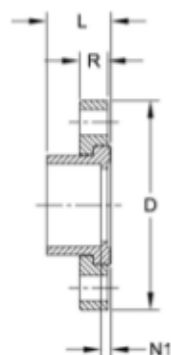

Size [inch]	P/L	Part No.		
½	08	854-005		
¾	08	854-007		
1	08	854-010		
1 ¼	08	854-012		
1 ½	08	854-015		
2	08	854-020		
2 ½	08	854-025		
3	08	854-030		
4	08	854-040		
6	08	854-060		
8	08	854-080		
10	02	854-100		
12	02	854-120		
14	05	854-140N *		
16	05	854-160N *		
18	05	854-180N *		
20	05	854-200N *		
24	05	854-240N *		

Size [inch]	# holes	Bolt Dia. [inch]	bolt cir. dia. [inch]	D [inch]	L [inch]	N1 [inch]	R [inch]	Design	
½	4	½	2.38	3.50	1.03	0.11	0.57	HC	
¾	4	½	2.75	3.88	1.15	0.13	0.58	HC	
1	4	½	3.13	4.25	1.38	0.11	0.66	HC	
1 ¼	4	½	3.50	4.63	1.45	0.14	0.69	HC	
1 ½	4	½	3.88	5.00	1.59	0.15	0.76	HC	
2	4	¾	4.75	6.00	1.76	0.20	0.82	HC	
2 ½	4	¾	5.50	7.00	2.05	0.22	0.98	HC	
3	4	¾	6.00	7.50	2.25	0.30	1.02	HC	
4	8	¾	7.50	9.00	2.65	0.34	1.11	HC	
6	8	¾	9.50	11.00	3.50	0.48	1.27	HC	
8	8	¾	11.75	13.50	4.63	0.50	1.73	HC	
10	12	¾	14.25	16.00	5.63	0.50	1.73	HC	
12	12	¾	17.00	19.00	6.69	0.56	1.73	HC	
14	12	1	18.75	21.00	11.75	4.75	1.00	FAB	
16	16	1	21.25	23.00	13.50	5.50	1.00	FAB	
18	16	1 ¼	22.75	25.00	15.50	6.50	0.50	FAB	
20	20	1 ¼	25.00	27.50	17.25	7.25	0.50	FAB	
24	20	1 ¼	29.50	32.00	19.50	7.50	0.50	FAB	