


+GF+ PPro-Seal

P/L 09: Mechanical Joint Fittings


Material: Natural Polypropylene

Caution: Threaded fittings are not recommended for pressure applications.

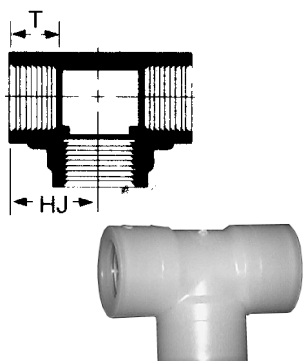


Tee (FT x FT x FT)

Inch Size	Part Number		sp/mp	lbs. each	hj	t min.
1/2	805-005F		5/25	0.05	1 7/32	11/16
3/4	805-007F		10/100	0.07	1 3/8	11/16
1	805-010F		5/35	0.13	1 11/16	13/16
1 1/2	805-015F		5/30	0.23	2 1/32	7/8
2	805-020F		5/10	0.35	2 5/16	15/16

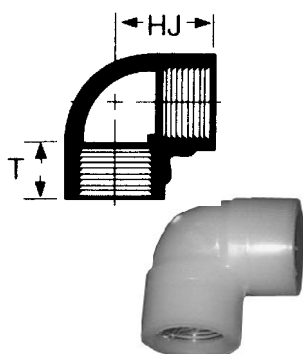


90° Ell (FT x FT)

Inch Size	Part Number		sp/mp	lbs. each	hj	t min.
1/2	808-005F		10/100	.04	1 7/32	11/16
3/4	808-007F		10/100	.05	1 3/8	11/16
1	808-010F		10/60	.09	1 11/16	13/16
1 1/2	808-015F		10/40	.18	2 1/32	7/8
2	808-020F		5/10	.27	2 5/16	15/16

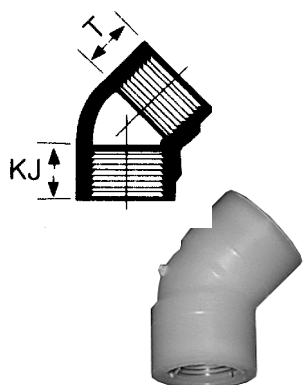

45° Ell (FT x FT)

Inch Size	Part Number		sp/mp	lbs. each	kj	t min.
1/2	819-005F		10/30	.03	1 1/32	11/16
3/4	819-007F		10/80	.05	1 1/8	11/16
1	819-010F		10/40	.08	1 3/8	13/16
1 1/2	819-015F		10/40	.15	1 9/16	7/8
2	819-020F		10/30	.21	1 23/32	15/16

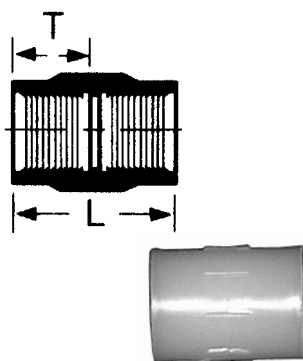

Coupling (FT x FT)

Inch Size	Part Number		sp/mp	lbs. each	l	t min.
1/2	830-005F		10/30	.03	1 9/16	11/16
3/4	830-007F		10/100	.04	1 11/16	11/16
1	830-010F		10/60	.06	2 1/16	13/16
1 1/2	830-015F		10/40	.11	2 7/32	7/8
2	830-020F		10/40	.15	2 9/32	15/16