
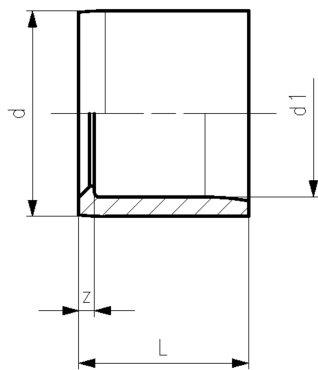





Reducing bush short PVC-U metric

Model:

- With solvent cement spigot and socket metric

	d [mm]	d1 [mm]	PN [bar]	Code	SP	Weight [kg]	z [mm]	L [mm]	
*	12	8	16	721 900 329	1	0.002	2	14	
*	16	12	16	721 900 331	10	0.002	2	14	
*	20	16	16	721 900 334	10	0.002	2	16	
*	25	20	16	721 900 337	10	0.004	3	19	
*	32	20	16	721 900 342	10	0.014	6	22	
*	32	25	16	721 900 341	10	0.009	3	22	
	40	20	16	721 900 348	10	0.021	10	26	
	40	25	16	721 900 347	10	0.021	7	26	
*	40	32	16	721 900 346	10	0.016	4	26	
	50	20	16	721 900 355	10	0.037	15	31	
	50	25	16	721 900 354	10	0.034	12	31	
	50	32	16	721 900 353	10	0.036	9	31	
*	50	40	16	721 900 352	10	0.030	5	31	
	63	32	16	721 900 360	10	0.064	16	38	
	63	40	16	721 900 359	10	0.067	12	38	
*	63	50	16	721 900 358	10	0.058	7	38	
*	75	50	16	721 900 365	10	0.109	13	44	
*	75	63	16	721 900 364	10	0.078	6	44	
	90	50	16	721 900 372	10	0.181	20	51	
	90	63	16	721 900 371	12	0.183	13	51	
*	90	75	16	721 900 370	10	0.135	7	51	
	110	50	16	721 900 379	5	0.316	30	61	
	110	63	16	721 900 378	5	0.308	23	61	
	110	75	16	721 900 377	20	0.295	17	61	
*	110	90	16	721 900 376	5	0.259	10	61	
	125	90	16	721 900 381	5	0.465	18	69	
*	125	110	16	721 900 380	5	0.267	8	69	
	140	90	16	721 900 386	5	0.562	25	76	
*	140	110	16	721 900 385	5	0.605	15	76	
*	140	125	16	721 900 384	5	0.331	7	76	
	160	90	16	721 900 391	5	0.751	35	86	
	160	110	16	721 900 390	6	0.883	25	86	
*	160	140	16	721 900 388	5	0.551	10	86	
	200	110	10	721 900 393	3	1.985	45	108	
	200	125	10	721 900 325	3	2.024	37	108	
	200	140	10	721 900 394	3	1.928	29	108	
*	200	160	10	721 900 392	2	1.085	20	108	
	225	110	10	721 900 397	4	2.544	57	120	
	225	125	10	721 900 399	4	2.563	49	120	
	225	140	10	721 900 398	4	2.609	41	120	
	225	160	10	721 900 396	2	2.199	31	119	
*	225	200	10	721 900 181	9	1.360	13	119	
	250	125	10	721 900 326	4	3.150	11	131	
	250	140	10	721 900 300	4	3.200	54	133	
	250	160	10	721 900 301	4	3.390	44	133	
*	250	200	10	721 900 302	4	3.198	24	133	
*	250	225	10	721 900 303	4	1.686	11	133	
	280	140	10	721 900 307	1	4.157	69	148	
	280	160	10	721 900 308	1	4.170	60	148	
	280	200	10	721 900 304	1	4.577	39	148	
*	280	225	10	721 900 305	1	4.409	27	146	
*	280	250	10	721 900 306	1	2.515	14	148	
	315	160	6	721 900 313	1	5.188	77	166	
	315	200	6	721 900 309	1	5.480	57	166	
	315	225	6	721 900 310	1	6.035	44	166	
*	315	250	6	721 900 311	1	6.481	32	166	
*	315	280	6	721 900 312	1	4.055	28	167	
	355	315	6	721 900 315	1	5.792	23	206	

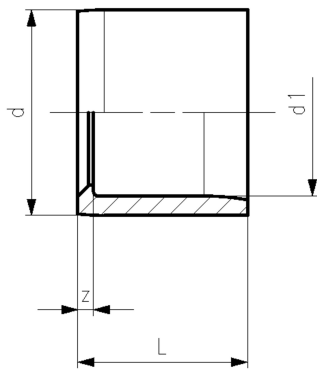

	d [mm]	d1 [mm]	PN [bar]	Code	SP	Weight [kg]	z [mm]	L [mm]	
* *	400	250	6	721 900 319	1	11.528	60	206	
	400	280	6	721 900 320	1	11.366	60	206	
	400	315	6	721 900 321	1	13.006	42	206	
	400	355	6	721 900 322	1	7.524	22	206	

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland
 Phone +41 -(0)52-631 1111
 e-mail: info.ps@georgfischer.com
 Internet: <http://www.gfps.com>