


SYGEF Standard Pressure retaining valve type 586 Unions with fusion sockets metric Without manometer

Model:

- Diaphragm PTFE/EPDM
- Integrated stainless steel mounting inserts
- 0.5-9.0 bar (7-130 psi)

0.3-3.0 bar (4-44 psi) on request

Manometer on request

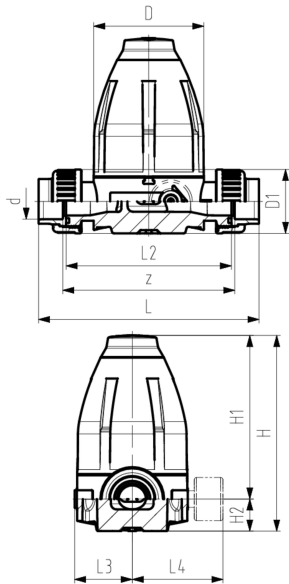

d [mm]	DN [mm]	PN [bar]	O-rings FPM Code	SP	Weight [kg]	
20	15	10	185 586 112	1	0.780	
25	20	10	185 586 113	1	1.670	
32	25	10	185 586 114	1	1.720	
40	32	10	185 586 115	1	4.700	
50	40	10	185 586 116	1	4.790	
63	50	10	185 586 117	1	5.090	

d [mm]	D [mm]	H [mm]	H1 [mm]	H2 [mm]	H3 [mm]	L [mm]	L2 [mm]	L3 [mm]	L5 [mm]	M	z [mm]	closest inch [inch]	
20	79	132	111	21	12	158	120	42	40	M6	130	1/2	
25	100	177	148	29	14	192	150	53	46	M6	160	3/4	
32	100	177	148	29	14	196	150	53	46	M6	160	1	
40	147	251	207	44	21	255	205	76	65	M8	215	1 1/4	
50	147	251	207	44	21	261	205	76	65	M8	215	1 1/2	
63	147	251	207	44	21	269	205	76	65	M8	215	2	

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland
 Phone +41 -(0)52-631 1111
 e-mail: info.ps@georgfischer.com
 Internet: <http://www.gfps.com>