



GG Series Gauge Guards

1/4" x 1/4" AND 1/4" x 1/2"

PVC, CPVC, PP AND PVDF

KEY FEATURES

- PVC, CPVC, PP and PVDF
- Threaded NPT Connections
- FPM Membrane
- All Thermoplastic, No Rust or Corrosion
- No Metal Fasteners
- Rugged, Low Profile, Compact Design
- Work in any Position
- Large Volume Gauge Guard Available
- Dual Faced PSI and kg/cm²


OPTIONS

- 0 to 30 PSI Gauge
- 0 to 60 PSI Gauge
- 0 to 160 PSI Gauge
- 0 to 160 PSI SS Liquid Filled Gauge, and Liquid Damped

TECHNICAL INFORMATION

PARTS LIST

1. Gauge/Instrument
2. Body
3. Oil-Filled Upper Chamber with Installed Gauge
4. FPM Membrane
5. Union Nut
6. End Connector

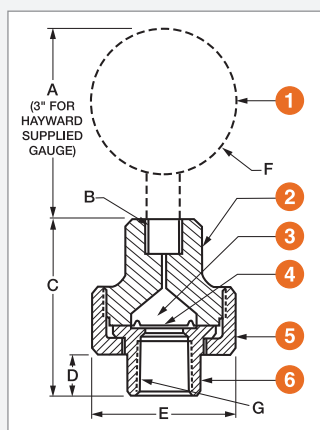

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/4" x 1/4" (DN8 – DN8)	PVC, CPVC or PP	Threaded	FPM	150 PSI @ 70°F Non-Shock
1/4" x 1/2" (DN8 – DN15)	PVC, CPVC or PVDF			

DIMENSIONS

SIZE in / DN	1 in / mm	2 in / mm	3 in / mm	4 in / mm	5 in / mm	6 in / mm	7 in / mm
1/4 x 1/4 / 8 x 8	3.0 / 76	1/4" NPT	2.69 / 68	.61 / 15	2.25 / 57	2.3 / 58	.25 / 6
1/4 x 1/2 / 8 x 15	3.0 / 76	1/4" NPT	2.69 / 68	.61 / 15	2.25 / 57	2.3 / 58	.50 / 13

Dimensions are subject to change without notice – consult factory for installation information



Hayward is a registered trademark
of Hayward Industries, Inc.
© 2011 Hayward Industries, Inc.

Contact Hayward Flow Control with questions: 1-888-429-4635 • Fax: 1-888-778-8410 • One Hayward Industrial Drive • Clemmons, NC 27012 • USA
Visit us at: www.haywardflowcontrol.com • E-mail: hflow@haywardnet.com