

GET PRODUCT INQUIRIES
AND QUOTES HERE
OR CALL 800-229-JACO

CELEBRATING
OVER 60 YEARS

Built on a reputation of customer
service, practical applications
experience and innovative engineering

Fittings Division >> Chemical Resistance



How to Select Materials

JACO tube fittings are manufactured in the following four thermoplastics:


(N) Nylon has good resistance to organic solvents, oils and gasoline. Good strength at high temperatures. Material rating: -40° to 200°F. Cold and hot-water applications. Longtime weathering resistance. Good impact resistance, both single and repeated. Not recommended for use with

ammonium, boric acid, calcium, sulfuric acid, or hydrochloric acid. F.D.A. listed. Also N.S.F. listed.

(C) Acetal, or acetal copolymer, has high tensile strength and good impact resistance over a broad temperature range. Translucent white color. Not affected by continuous hot-water service and works smoothly with metal tubing. Acetal cannot be recommended for continuous exposure to solutions with a chlorine concentration greater than 1 ppm. Material is rated at -40° to 200°F in open air, and rated for 180°F in water applications. Unaffected by most inorganics, except sulfuric, nitric and hydrochloric acids. Listed by U.S.D.A. and F.D.A. for coffee, milk and antibiotics. Also N.S.F. listed. Should not be continuously exposed to sunlight.

(P) Polypropylene has good chemical resistance. Material is rated at -30 to 215°. Opaque, white color. Unaffected by most weak acids and alkalis. Below 175°F it has good resistance to organic solvents. Do not use with oxidants or strong acids or in continuous sunlight. N.S.F. listed. 20% glass filled for improved stiffness.

(K) PVDF, a polyvinylidene fluoride, has outstanding chemical resistance for handling highly corrosive fluids. Material rated at -80 to 275°, with a cloudy, white color. F.D.A. listed, N.S.F. Listed.

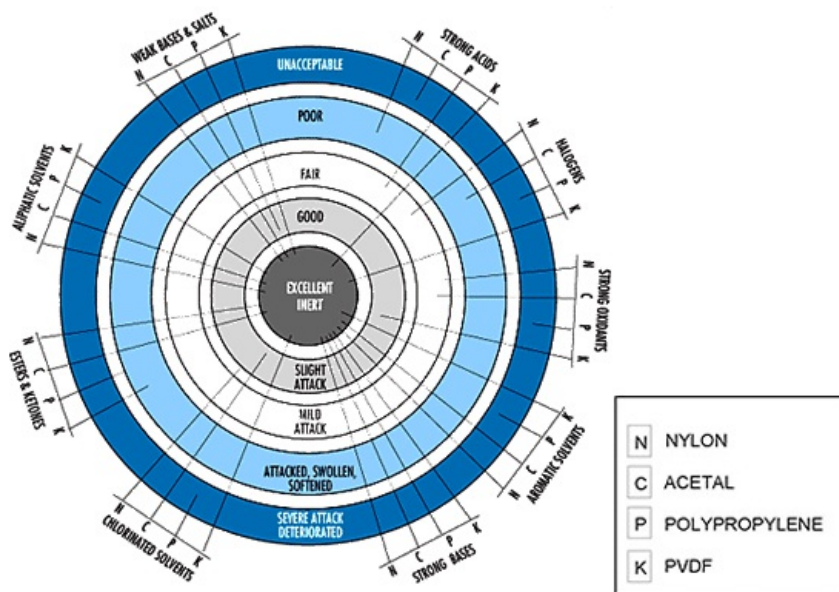

Operating temperatures of JACO Tube Fittings are regulated by ambient and fluid temperatures, type of fluid being carried, tubing type, and conditions of mechanical abuse. Temperatures listed are designated as material ratings only. Testing of complete fitting in customer application is recommended.

