

WINSMITH



SE MAXIMIZER® PLUS SPEED REDUCERS





Table of Contents

TOPIC	PAGE
Brochure Index	2
Introduction to Winsmith SE Speed Reducer Series	2
Winsmith SE Maximizer Plus Reducer Highlights	3
SE Maximizer Plus Reducer Product Features & Benefits	3
SE Maximizer Plus Mechanical Ratings, HP & Torque Output	4
SE Maximizer Plus Reducer Accessories	5
Solid Output Shaft	6-7
Hollow Output Shaft	8-9
Worm Gear Ratio Multiplier	10-13
Helical Gear Ratio Multiplier	14



Winsmith SE Maximizer Plus Speed Reducer

Winsmith's SE Maximizer Plus Speed Reducers are intended for wash down applications. The SE Maximizer Plus features the Winsmith WinGuard Epoxy Coating System that sets the benchmark for superior harsh environmental performance.

SE Maximizer Plus Speed Reducer Features:

- WinGuard White Epoxy Paint Coating System exceeds ASTM B-117 1000 hour salt spray test
- WashTite Motor Gasket ensures a watertight seal between the motor and reducer
- Stainless Steel hollow and solid output shafts
- Premium Mobil Glygoyle 460 lubricant is NSF H1 registered for incidental food contact
- Optional patented WINSHIELD™ Sealing System uses a network of five barriers to keep contaminants out and lubrication in the speed reducers
- Winsmith 2 year warranty

SE Maximizer Plus is a part of the Winsmith SE Speed Reducer Series. Featuring more than 6 million configurations, it sets the benchmark for unique, powerful performance.



SE Maximizer Plus






Unique open/close vent allows flexibility for reducer to be properly applied indoors or out, in wet, dusty or dirty environments

High temperature seals for longer life

Puller slots are located on both sides of all hollow output shafts for easy reducer removal

Symmetric hollow shafts provide total mounting flexibility

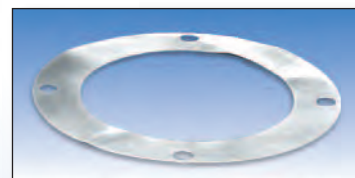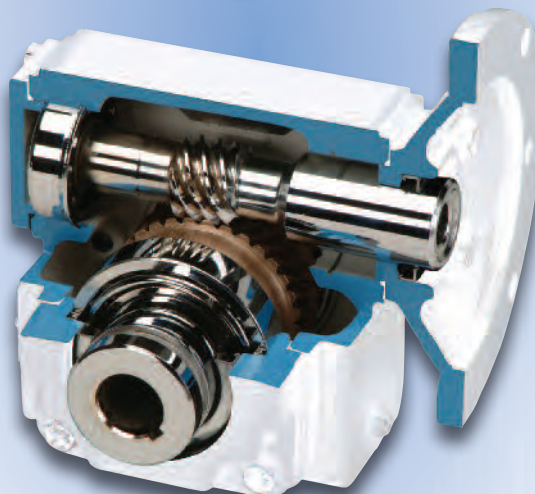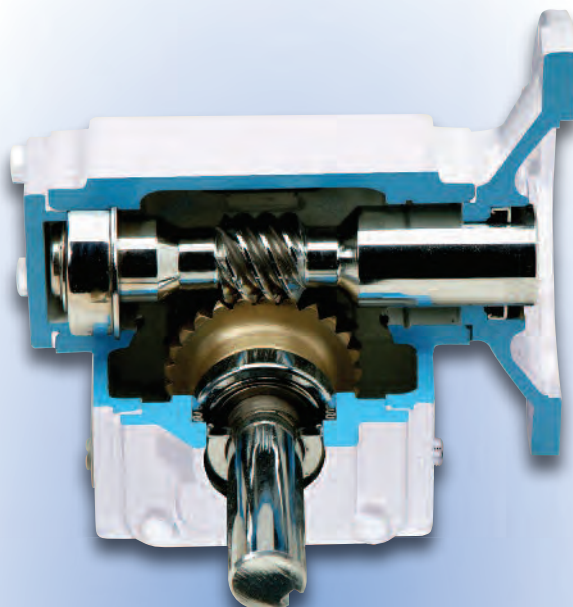

WashTite white gasket ensures watertight motor/reducer interface

WinGuard™ white epoxy coating system exceeds 1000 hour salt spray test ASTM B-117

V-ring seals on solid output shafts for added contaminant protection

Stainless steel solid and hollow output shafts provide maximum corrosion protection

Factory filled with Mobil Glygoyle™ 460 NSF H1 food grade lubricant

2 Year Warranty



WINSHIELD™
advanced sealing
technology system