

FOR 1/4" BELTS
FAIRLOC® HUB
DOUBLE OR NO FLANGE

PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM



> MATERIAL:
 Aluminum Alloy

> FINISH:
 Clear Anodized

> SPECIFICATIONS:
 O.D. Tolerance:
 12 to 32 grooves is $+.002 / -.000$
 36 to 72 grooves is $+.003 / -.000$

Other sizes available on special order.


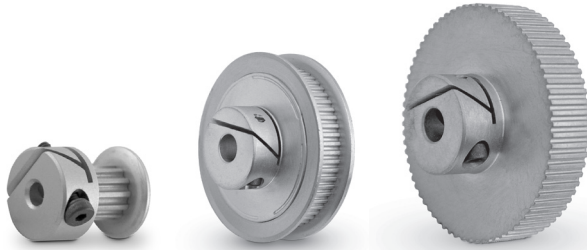


Fig. 1




Fig. 2




Fig. 3

INCH COMPONENT

Catalog Number	No. of Grooves	P.D.	O.D.	F.D. $\pm 1/64$	B Bore $+.001 / -.000$	W Body	E Length $\pm 1/64$	C Hub Dia. $\pm 1/64$	D Hub Proj.	Cap Screw
Fig. 1										
A 6D16-012DF2504	12	.306	.286	.480	.125	—	9/16	.480	15/64	#2-56
A 6D16-015DF2506	15	.382	.362	.555	.1875	—	9/16	.555	15/64	#2-56
A 6D16-016DF2506	16	.407	.387	.580	.1875	—	9/16	.580	15/64	#2-56
A 6D16-018DF2508	18	.458	.438	.635	.250	—	9/16	.625	15/64	#2-56
A 6D16-020DF2508	20	.509	.489	.685	.250	—	9/16	.625	15/64	#2-56
A 6D16-022DF2508	22	.560	.540	.740	.250	—	9/16	.625	15/64	#2-56
A 6D16-024DF2508	24	.611	.591	.790	.250	—	11/16	.625	11/32	#2-56
A 6D16-025DF2508	25	.637	.617	.815	.250	—	11/16	.625	11/32	#2-56
A 6D16-028DF2508	28	.713	.693	.895	.250	—	11/16	.625	11/32	#2-56
A 6D16-030DF2508	30	.764	.744	.945	.250	—	11/16	.625	11/32	#2-56
A 6D16-032DF2508	32	.815	.795	1.000	.250	—	11/16	.625	11/32	#2-56
Fig. 2										
A 6D16-036DF2508	36	.917	.897	1.105	.250	.389	11/16	.625	19/64	#2-56
A 6D16-040DF2508	40	1.019	.999	1.210	.250	.405	23/32	.750	5/16	#4-40
A 6D16-048DF2508	48	1.222	1.202	1.420	.250	.405	23/32	.750	5/16	#4-40
A 6D16-060DF2508	60	1.528	1.508	1.730	.250	.405	23/32	.750	5/16	#4-40
Fig. 3										
A 6D16-060NF2508	60	1.528	1.508	—	.250	—	3/4	.750	3/8	#4-40
A 6D16-072NF2508	72	1.833	1.813	—	.250	—	3/4	.750	3/8	#4-40