

ProControl™

MODEL: PV3P2403225

TYPICAL PERFORMANCE

Humphrey®


CONNECTIONS

Pneumatic	10-32 UNF ports
Electrical	18" Lead Wires (white)
Mounting	#6-32 x 0.25" Dp (2x)

FEATURES

- Each ProControl™ Valve is tested for unactuated seat leakage not to exceed 2ccm at rated pressure (Port 1 > Port 2).
- Typical hysteresis is 8% or less and measured from ascension and descension of current at a given flow point.
- Control flow with direct current to 100mA or with PWM. For best results, we recommend PWM of 5k Hz or greater.
- When testing and evaluating proportional valves, consider the Humphrey Valve Driver, model PCD. PCD accepts a 4-20mA, 0-5VDC or 0-10VDC signal and drives the proportional valve accordingly.
- PV3P2403225 may be calibrated to specific customer parameters in some applications. Contact an application specialist for details (below).
- For additional assistance in understanding, selecting and using proportional control valves, contact a Humphrey application specialist at:
1-844-447-9009
procontrolway@humphrey-products.com

Graph depicts typical performance of Humphrey Proportional Valve Model PV3P2403225 using a stabilized upstream pressure of 25 PSI, filtered air, at Port 1 and amperage of 0-100mA. Performance is repeatable for millions of cycles. If pressure or current exceed maximum recommended values, performance may be compromised.

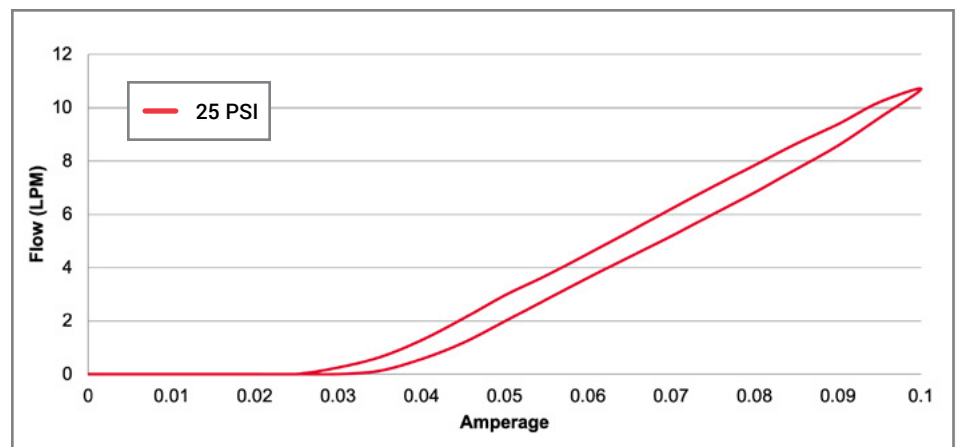

Calibrated with stabilized upstream pressure of 25 PSI to a flow of 10 SLPM @ 100mA. PV3P2403225 will have precision control but less flow when the stabilized upstream pressure is lower than 25 PSI.

HUMPHREY-PRODUCTS.COM

A privately owned US company since 1901.
© 2021 Humphrey Products Company, Inc.
Printed in USA.

PSPCDT0821

Humphrey Products Company
5070 East N Avenue
Kalamazoo, MI 49048 USA
P: 269.381.5500
F: 269.381.4113



ACCESS ONLINE CATALOG

Obtain 3D CAD Download, CAD Viewer,
2D Dimensional Drawings, Product Images,
DataSheet PDFs, Product Accessories

Certified: ISO 9001:2015